



Set Carrier Dolly System includes:  
One pair Aluminum Carrier Dollies,  
One Aluminum Tow Bar,  
One Zinc-plated Steel Pry Bar,  
One Aluminum Motorcycle Hook Adaptor,  
One pair Bed Ramps

**CD-S**



Quad Carrier Dolly System includes:  
Four each Aluminum Carrier Dollies,  
One Aluminum Tow Bar,  
One Zinc-plated Steel Pry Bar,  
One Aluminum Motorcycle Hook Adaptor  
One pair Bed Ramps

**CD-SQ**



One Pair Bed Ramps — 24" Each

**CD-BR**

One Aluminum Carrier Dolly  
Telescopic nine-hole,  
2,000-lb Capacity

**CD-MD**

Aluminum Motorcycle Tow Hook Adaptor

**CD-MC**



Zinc-Plated Steel Pry Bar

**CD-PB**

Aluminum Tow Bar — 64" Wide  
2,000-lb Vertical Lift Capacity

**CD-TB**



One pair Aluminum Tow Cradles  
Used for Carrier Dollies as well as all  
Makes of highway dollies — Adjustable

**CD-TC**



Hi-Speed®Dolly includes:  
Greaseable Aluminum Hubs,  
Polished Aluminum Wheels,  
3,040-lb rated 4.80 x 8 Tires,  
Steel 5-hole Telescoping Axles,  
Aluminum Square Pry Bar

**SLXA-480S**



Hi-Speed®Dolly includes:  
Greaseable Aluminum Hubs,  
Polished Aluminum Wheels,  
3,040-lb rated 4.80 x 8 Tires,  
Aluminum 6-hole Telescoping Axles,  
Aluminum Square Pry Bar

**SLXA-480A**



Hi-Speed®Dolly includes:  
Greaseable Aluminum Hubs,  
Polished Aluminum Wheels,  
4,280-lb rated 5.70 x 8 Tires,  
Steel 5-hole Telescoping Axles,  
Aluminum Square Pry Bar

**SLXA-570S**



Hi-Speed®Dolly includes:  
Greaseable Aluminum Hubs,  
Polished Aluminum Wheels,  
4,280-lb rated 5.70 x 8 Tires,  
Aluminum 6-hole Telescoping Axles,  
Aluminum Square Pry Bar

**SLXA-570A**



Hi-Speed®Dolly includes:  
Greaseable Aluminum Hubs,  
Steel 5-lug Wheels,  
3,040-lb rated 4.80 x 8 Tires,  
Steel 5-hole Telescoping Axles,  
Aluminum Square Pry Bar

**SLXS-480S**



Hi-Speed®Dolly includes:  
Greaseable Aluminum Hubs,  
Steel 5-lug Wheels,  
3,040-lb rated 4.80 x 8 Tires,  
Aluminum 6-hole Telescoping Axles,  
Aluminum Square Pry Bar

**SLXS-480A**



Hi-Speed®Dolly includes:  
Greaseable Aluminum Hubs,  
Steel 5-lug Wheels,  
4,280-lb rated 5.70 x 8 Tires,  
Steel 5-hole Telescoping Axles,  
Aluminum Square Pry Bar

**SLXS-570S**



Hi-Speed®Dolly includes:  
Greaseable Aluminum Hubs,  
Steel 5-Lug Wheels,  
4,280-lb rated 5.70 x 8 Tires,  
Aluminum 6-hole Telescoping Axles,  
Aluminum Square Pry Bar

**SLXS-570S**



Added —

Zinc Plating:  
Two-Toned,  
Silver/Gold

**SL-Z**



Chevy 2500-3500 Push Bumpers 2008-2010

**PB-CH38-08**



Chevy 4500-5500 Push Bumpers 2008-Present

**PB-CH55-08**



Dodge 3500-5500 Push Bumpers 2011-Present

**PB-DG55-11**



GM/Chevy 2500-3500 Push Bumpers 1992-1997

**PB-GM35-92**



International Navistar 4300 Push Bumper 2002-Present

**PB-IH43-02**



Ford 2500-5500 Push Bumpers 99-04

**PB-F550-99**



Ford F250-F550 Push Bumpers 05-07

**PB-F550-05**



Ford F250-F550 Push Bumpers 08-10

**PB-F550-08**



Ford F250-F550 Push Bumpers 11-Present

**PB-F550-11**



Ford 150 Push Bumpers 2004-2008

**PB-F150-04**



Fifth Wheel Hitch (15,000 lb. Vertical Capacity)  
(Ball & Pintle Hook Hitches not Included)

**FW-FLH**



Fifth Wheel Hitch Mount (15,000 lb. Vertical Capacity)  
(Ball, Goose Neck Ball, & Pintle Hook Hitches not Included)

**FW-HMT**



Fifth Wheel Hitch Head  
(Pickup Bed Stands Included)

**FW-HH**



Dolly Mount (Combination):  
Dolly / Cross Rail / Pry Bar — Locking

**DM-CDR**



Dolly Mount (Parallel-Motion) — Articulating

**DM-PM**



Dolly Mount (Self-loading w/Tire Cradles) —  
Articulating

**DM-SL**





Dolly Mount (4.80 Short — 4”)

**DM-SL4**



Dolly Mount (5.70 Short — 5”)

**DM-SL5**



Dolly Mount (4.80 Tall—9”)

**DM-SD4**



Dolly Mount (5.70 Tall—10”)

**DM-SD5**





Dolly Mount  
(Cross Rail — Locking)

**DM-CRL**



Dolly Mount  
(Cross Rail — Locking — Stepped)

**DM-CRLS**



Dolly Mount  
(Cross Rail — Slanted)

**DM-CRS**



Dolly Mount  
(Cross Rail — Divided)

**DM-CRD**



Dolly Mount (4.80—Slanted)

**DM-SL4S**



Dolly Mount (5.70—Slanted)

**DM-SL5S**



Dolly Mount (Self-loading—Half)

**DM-SLH**



Dolly Mount (Tire Cradles — set of four)

**DM-SLTC**



Dolly Mount (Parallel-Motion—Half)

**DM-PMH**



Dolly Mount (Cross Rail—Locking “T” Handle Half)

**DM-CRLT**



Dolly Mount (Cross Rail—Locking “Rest” Half)

**DM-CRLR**



DOLLY FRAME COMPLETE  
w/GREASEABLE ALUMINUM HUBS,  
STEEL 5-LUG RIMS & 4.80x8 TIRES  
BLACK COATING STANDARD

DFXA-SL4CS



DOLLY FRAME COMPLETE  
w/GREASEABLE ALUMINUM HUBS,  
STEEL 5-LUG RIMS & 5.70x8 TIRES  
BLACK COATING STANDARD

DFXA-SL5DS



DOLLY FRAME COMPLETE  
w/GREASEABLE ALUMINUM HUBS,  
POLISHED ALUMINUM 5-LUG RIMS &  
5.70x8 TIRES  
BLACK COATING STANDARD  
SHOWN HERE IN TWO-TONED ZINC

DFXA-SL4CA



DOLLY FRAME COMPLETE  
w/GREASEABLE ALUMINUM HUBS,  
POLISHED ALUMINUM 5-LUG RIMS &  
5.70x8 TIRES  
BLACK COATING STANDARD  
SHOWN HERE IN TWO-TONED ZINC

DFXA-SL5DA



DOLLY FRAME — BODY ONLY  
w/o ASSEMBLIES

DFX-SLX



DOLLY FRAME — ASSEMBLED  
w/BARE SPINDLES

DFX-SLXB



DOLLY FRAME  
w/STEEL 5-LUG HUBS

DFXS-SLH



DOLLY FRAME  
w/ALUMINUM 5-LUG HUBS

DFXA-SLH



DOLLY FRAME COMPLETE  
w/STEEL HUBS,  
STEEL 5-LUG RIMS  
4.80x8 C-RANGE TIRES  
BLACK COATING STANDARD

DFXS-SL4CS



DOLLY FRAME COMPLETE  
w/STEEL HUBS,  
STEEL 5-LUG RIMS  
5.70x8 D-RANGE TIRES  
BLACK COATING STANDARD

DFXS-SL5DS



4.80x8 Load Range C Tire (760 lb — 338 kg)  
on Powder-coated Aluminum 5-Hole Mini-Mag Wheel

**WA-4CA**



5.70x8 Load Range D Tire (1070 lb — 488 kg)  
on Powder-coated Aluminum 5-Hole Mini-Mag Wheel

**WA-5DA**



4.80x8 Load Range C Tire (760 lb — 338 kg)  
on Silver Painted 5-Hole Steel Wheel

**WA-4CS**



5.70x8 Load Range D Tire (1070 lb — 488 kg)  
on Silver Painted 5-Hole Steel Wheel

**WA-5DS**



4.80x8 Load Range C Tire Only (760 lb — 338 kg)

**WA-4TC**



5.70x8 Load Range D Tire Only (1070 lb — 488 kg)

**WA-5TD**



8" Wheel, Aluminum, 5-Hole, Slotted, Powder-Coated

**WA-WHA**



8" Wheel, Steel, 5-Hole, Silver E-Coated

**WA-WHS**



Hub Bare, Aluminum, Slotted, Polished, Greaseable

**WA-HBA**



Hub Bare, Steel, Painted

**WA-HBS**



Hub Complete, Aluminum, 5-Lug; Includes:  
Races, Bearings, Spindle Nut, Washer, Cotter Pin,  
Grease Seal, & Dust Cover

**WA-HCA**



Hub Complete, Steel, 5-Lug; Includes:  
Races, Bearings, Spindle Nut, Washer, Cotter Pin,  
Grease Seal, & Dust Cover

**WA-HCS**



Bearing Cup — pair (Race # L44610)

**WA-BC**



Bearing Roller — pair (Bearing Cup # L44643)

**WA-BR**



Grease Seal — Spring Loaded(# TRP-GS-1250DL)

**WA-GS**



Flat Washer (1-1/32" ID x 1-3/4" OD)

**WA-FW**



Castle Nut (1" Slotted Spindle Nut)

**WA-CN**



Cotter Pin (3/32" x 2")

**WA-CP**



Dust Cap (1.98" Diameter Dust Cover)

**WA-DC**



Lug Nuts — Qty. five

**WA-LN**



Lug Stud

**WA-LS**



Valve Stem (Chrome)

**WA-VS**



Bearing Kit

**WA-BK**



Steel Cross Rail Telescopic, 5-Hole  
OD collapsed: 61" ID extended: 84"  
(Each)

**CR-T5**



Steel Cross Rail (Telescopic, 5-Hole  
OD collapsed: 61" ID extended: 84"  
(Set of two)

**CR-T5/S**



Aluminum Cross Rail Telescopic, 6-Hole  
OD collapsed: 61" ID extended: 84"  
(Each)

**CR-T6a**



Aluminum Cross Rail Telescopic, 6-Hole  
OD collapsed: 61" ID extended: 84"  
(Set of two)

**CR-T6a/S**





Steel Male Rail (Inner Axle Tube)

**CR-MR**



Steel Female Rail (Outer Axle Tube)

**CR-FR**



Male Rail Aluminum (Inner Axle Tube)

**CR-MRA**



Female Rail Aluminum (Outer Axle Tube)

**CR-FRA**



Rail Plunger, Stainless Steel (Old Style-Slotted)

**CR-RP**



Rail Spring (Old Style — Flat Spring)

**CR-RS**



Rail Plunger, Stainless Steel (New Style)

**CRX-RP**



Rail Spring (New Style — Coil Compression Spring)

**CRX-RS**



Steel Rail End for Steel Cross Rails

**CR-RE**



Steel Rail End for Aluminum Cross Rails

**CR-REA**



Rail End Bolt & Nut for Aluminum Cross Rails  
(Stainless Steel)

**CR-REAB**



Spindle Assembly/Left —SLX Dollies  
Includes Machined Shoulder Bolt

DFX-SA/L



Spindle Assembly/Right —SLX Dollies  
Includes Machined Shoulder Bolt

DFX-SA/R



Spindle Assembly Grade 8 Hardened  
Machined Shoulder Bolt —SLX Dollies  
Includes Lock Nut

DFX-SSB



Trip Assembly Grade 8 Hardened  
Machined Shoulder Bolt—SLX Dollies

DFX-TSB



Trip Assembly/Left—SLX Dollies  
Includes Shoulder Bolt and Spring

DFX-TA/L



Trip Assembly/Right—SLX Dollies  
Includes Shoulder Bolt and Spring

DFX-TA/R



Trip Spring/Left—All High-Speed Dollies  
1975 to Present

DF-TS/L



Trip Spring/Right—All High-Speed Dollies  
1975 to Present

DF-TS/R



Ratchet Spring/Left and Right

DF-RS



Safety Tie-Down Straps—w/Ratchet  
Buckles (Four Pieces)

DF-TDS



Ratchet Assembly/Left (Old Style)  
—SL Dollies 1977-2006

DF-RA/L



Ratchet Assembly/Right (Old Style)  
— SL Dollies 1977-2006

DF-RA/R



Ratchet Assembly/Left (New Style)  
—SLX Dollies 2006-Present

DFX-RA/L



Ratchet Assembly/Right (New Style)  
—SLX Dollies 2006-Present

DFX-RA/R



Ratchet Assembly Body  
—SLX Dollies

DFX-RAB



Ratchet Cam—SLX Dollies

DFX-RC



Ratchet Shoulder Bolt  
—SLX Dollies

DFX-RSB



Grease Zerk — Threaded,  
Spring-Loaded, Ball Check

DF-GZ



Pry Bar — 1" Square Aluminum  
Length: 5 ft — 152 cm  
Weight: 5.9 lb — 2.7 kg  
Material: 6061-T6 Aircraft Grade Aluminum

DF-PBA



Pry Bar — 1" Round — Yellow Zinc Plated  
Length: 5 ft — 152 cm  
Weight: 13.4 lb — 6.1 kg  
Material: Drawn-Over-Mandrel Steel

DF-PBZ



Rail Pocket Assembly  
—SLX Dollies

DFX-RP




Safety Lock—SLX Dollies Complete Assembly

DFX-SL



Safety Lock Kit (Includes DF-SLZ, DF-SLS, DF-SLB, DF-SLP, DF-SLH)

DF-SLK

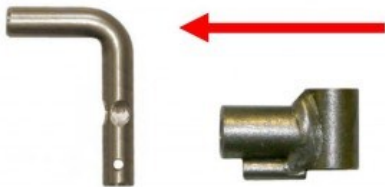

Safety Lock Handle

DF-SLH

Safety Lock Body

DFX-SLB



Safety Lock Roll Pin

DF-SLP



Safety Lock Ball Bearing

DF-SLB



Safety Lock Spring

DF-SLS



Safety Lock Grease Zerk

DF-SLZ

	Gas Strut (DM-SL)	<b>DM-GS/S</b>
	Gas Strut (DM-PM)	<b>DM-GS/P</b>
	Ball Stud (DM-SL)	<b>DM-BS/S</b>
	Ball Stud (DM-PM)	<b>DM-BS/P</b>
	Front Latch Assembly (DM-SL)	<b>DM-FLS</b>
	Rear Latch Assembly (DM-SL)	<b>DM-RLS</b>
	Cup Latch Assembly (DM-SL)	<b>DM-CLS</b>
	Latch Assembly (DM-PM)	<b>DM-PML</b>
	Lynch Pin	<b>DM-LP</b>
	Latch Spring (DM-SL & DM-PM)	<b>DM-LS</b>