







Auto Crane's HC-9 (hydraulic crane) is engineered specifically for Class 6 mechanic's trucks and equipped with the industry's leading, truly proportional truck-mounted crane control technology—NexStarTM.

Key Specifications

Weight:

1,500 lb (680.4 kg)

Single Line Speed:

60 ft/min (18.3 m/min)

Extended Boom Length: 20' 6" (6.2 m)

Boom Elevation Range:

-14° - +75°

Boom Rotation:

370°, full, non-continuous

Hydraulic Requirements:

13-17 gpm (49-64 L/min)

at 2,750 psi (189.6 bar)

Cable:

95 ft (28.95 m) of 3/8" (9.52 mm) EIPS IWRC galvanized wire rope

Control Options:

NexStar II, Hardwire

Warranty:

Two-year factory warranty






Engineered First. Engineered to Last. Capacity: 9,000 lb (4,082 kg)
Rating: 59,000 ft-lb (8.15 tM)

Features and Benefits of NexStar™

- · Automatic stop at 100% load capacity
 - Keeps people, equipment, and loads safer
- Adjustable speed settings; from 25% to 100%
 - Enables fine tuning of speeds for total control over the load
- · Proportional control of multiple functions simultaneously and independently
 - Adjust any function anytime to a different speed, for total control over the load
- Level sensors monitor the angle of the truck and crane with the NexStar FM remote system on a Titan® crane body
 - Prevents operation in unsafe, unlevel conditions
- The NexStar FM remote system receiver displays load-monitoring and diagnostic readouts in plain English
 - No codes to look-up or memorize; operator views precise percentage load capacity

HC-9 Load Chart

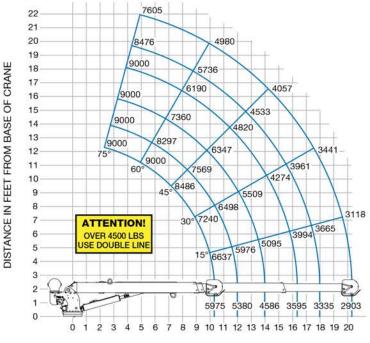

DISTANCE IN FEET

P/N 491000300 A

Note: All capacities shown in lbs.

Weight of load handling devices are part of the load and must be deducted from the capacity.





Zips.com | 800-222-6047