


**CHEVRON**<sup>TM</sup>

**LIGHT DUTY WRECKER**

**MODEL 408V/408T**

**RENEGADE**



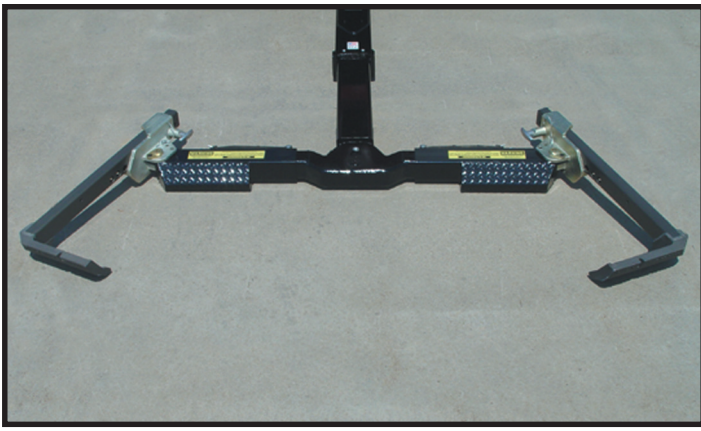

Chevron's optional pivoting L-arm system lets you hook up fast and damage free. Light weight L-arms with horizontal pivoting receivers allow for a quick, efficient hookup even if the wheels are turned.

### STANDARD EQUIPMENT

- Left and right side entry tool boxes
- Releasable L-arms
- FMVSS 108 lighting
- Junction box and wire harness
- Safety chain pockets
- Dual rear controls
- Rear chain anchors
- Safety chains
- Cable tensioner (with winch)
- Tow light plug
- Wheel straps
- 12 inch sills
- Rear enclosed wheel wells
- Pilot operated holding valves
- Lubrication fittings on all pivot points
- Backup alarm
- In prime
- Mudflaps

### OPTIONAL EQUIPMENT

- Slanted pylon
- Aluminum trim light pylon
- Jumbo lighted tunnel tool box
- In cab electric remote controls
- Rear wheel fender flares
- Pump
- Stainless steel body sides
- PTO
- Clutch pump
- AutoGrip™ II
- Pivoting L-arms
- Radio remote control

### ACCESSORIES

- Bar light
- Work lights
- Switch panel
- Tow sling
- Fender flares
- Magnetic tow lights
- J-hook chains
- 2 in. frame forks (STD. Crossbar)
- Push bumper
- Trailer hitch adaptor for AutoGrip™ II
- Towbar adaptors for AutoGrip™ II
- Motorcycle adaptors for AutoGrip™ II
- L.E.D. lights
- Pintle hitch adaptor (STD Crossbar)



Chevron's optional AutoGrip II™ wheel lift allows the wheel retainer arms to hydraulically rotate from a fully closed storage position to a fully open approach position.

### CHASSIS RECOMMENDATIONS

	408V/408T
CA	60, 84
Minimum GVWR	11,000 lb.
Maximum GVWR	22,000 lb.
Maximum Frame Height	37 inches
Minimum Frame RBM	280,000 in • lbs

### SPECIFICATIONS

Body width	86 inches
Boom elevation	30 degrees
Boom reach past tail board	63 inches
Underlift reach	70 inches
Power tilt range	Vertical to negative 10 degrees
Control valve	Sectional, 12 GPM, 1700 PSI
Oil reservoir	10 gallons
Oil filter	250 PSI, 15 GPM, 10 Microns
Direct mount pump	18 GPM @ 1200 RPM
Clutch pump	9 GPM @ 1250 RPM

RATINGS* (lbs.)	408V	408T
WINCH	9,000 Planetary	9,000 Planetary
CABLE	3/8 x 100	3/8 x 100
BOOM		
• Extended	N/A	8,000
• Retracted	16,000	16,000
UNDERLIFT:		
• Extended	4,000	4,000
• L-arms (Paired)	4,000	4,000
• Tow	8,000	8,000

\* Load ratings are based on structural factors - not chassis capability or capacity.

*Chevron reserves the right to improve or upgrade its products without obligation to modify previously manufactured units. This publication is printed in the U.S.A. and is the exclusive property of Chevron, Inc.*

Patents: Releasable L-Arm #4,875,822  
AutoGrip II #5,692,871  
BackSaver Wheel Retainer #5,628,609

1.5M0704

# CHEVRON™

Distributed By:

Chevron, Inc.  
7320 W. Market Street • U.S. Route 62 • Mercer, PA 16137  
(724) 981-7500 • Toll Free (800) 886-6400 • FAX (724) 981-4425  
www.chevroninc.com