



Models 896/897



Some optional equipment shown.

Designed to Meet the Demanding Needs of Today's Professional Operator


Your business depends on a wide range of road service applications. The Vulcan 896/897 Medium Duty Series offers you the power, versatility and dependable performance to satisfy that wide range of requirements such as motor homes, delivery vans and autos.

The separate boom and underlift controls, along with

Vulcan's patented strapless wheel lift hook up are just a few of the user friendly features that sets Vulcan far ahead of the competition.

For more information on how the Vulcan 896/897 can help meet your demands and increase your profit, contact your local Vulcan distributor.

Vulcan Models 867 and 897

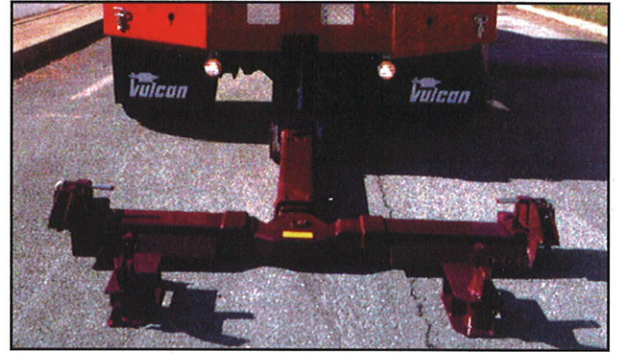

Vulcan's many popular features include separate boom and underlift controls, a sleek heavy-duty 84" C.A. body with spacious storage capacity and best of all – Vulcan's field proven high capacity underlift making this one of the most user friendly units available today.

The 896 and 897 comes standard with Vulcan's patented 6,500 lb. strapless wheel retainer system. For heavier loads your underlift is equipped with a set of 3" low profile and 3" high profile lifting forks.

STANDARD FEATURES

- Vulcan's patented 6,500 lb. wheel retainer wheel lift system
- 84" cab to axle steel body with 2 tool compartments per side (tunnel on front compartment)
- Dual lift cylinders on recovery boom
- Body width 94"
- Tail board chain pockets for safety chains
- Wheel lift safety chains
- Safety chain guards
- Wheel retainer storage pockets built into body
- Independent wheel lift tilt
- Dual wheel lift control stations located at the tail board
- Dual boom control stations located on the deck
- Mud flaps
- FMVSS lighting
- Tandem hydraulic pump
- Dual hydraulic tanks on 897
- Free spool handle
- Cable tensioners
- Conventional sling support brackets
- 1 set of 3" low, and one set of 3" high profile frame forks and holders

OPTIONAL EQUIPMENT

- Stainless steel panels & tool compartments
- Emergency lighting
- 24" or 36" spacer tool boxes
- Dress-up packages ▪ Sling
- Trailer hitch ▪ P.T.O. ▪ 2" or 4" Fenderettes
- Light pylons ▪ Wheel simulators
- Other lifting attachments
- 6,000 lb. car wheel retainers

DESCRIPTION		896	897
Recovery Boom:	Retracted	24,000 lbs.	28,000 lbs.
	Extended at 34° (TEMA)	10,000 lbs.	12,000 lbs.
	Maximum lift angle	34°	34°
	Maximum boom height	149"	149"
	Reach past tailboard lowered	76"	76"
Winch Type:	Winch	12,000 lbs. (Planetary)	14,000 lbs. (Worm Gear)
Cable:	Per winch	150' x 7/16"	150' x 1/2"
Underlift:	Lift capacity extended with forks	8,000 lbs.	8,000 lbs.
	Lift capacity extended on wheel lift	6,500 lbs.	6,500 lbs.
	Lift capacity fully retracted with forks	10,000 lbs.	10,000 lbs.
	Maximum reach to center of forks	72"	72"
	Tow Rating	26,000 lbs.	26,000 lbs.
Suggested Chassis Minimum:	GVWR	25,000 lbs.	25,000 lbs.
Cab to Axle (Clear)	Minimum (Standard body)	84"	84"
	Max. (with spacer boxes)	132"	132"

NOTE: Some optional equipment may be shown. Other Vulcan Towing and Recovery Equipment is available from your local Vulcan Distributor.

Note: Ratings are based on structural factors only – not chassis capacity. Vulcan reserves the right, without notice and without obligation, to improve or modify products, which may change the specifications, models and feature availability. Maximum tire size is 245/70 R22.5 G159.

DISTRIBUTED BY:



Equipment Company Inc.

8503 Hilltop Drive • Ooltewah, TN 37363

Toll Free: 1-800-489-2401 • FAX: (800) 960-6667

Website: www.millerind.com