



SERIESTM
www.sidepuller.com

In The DitchTM
TOWING PRODUCTS



SP SERIES™ SIDEPULLERS™



IS THE SIDEPULLER™ RIGHT FOR YOU?

- ✓ Have you ever been dispatched to recover a vehicle only to find upon arrival that it is down an embankment that would require the use of a wrecker?
- ✓ With the increasing cost of business, are you trying to find ways to do MORE with less?
- ✓ Are you a small company that is faced with the tough decision of running either a wrecker OR a carrier?
- ✓ Are you a large company trying to utilize your equipment to the most of its potential?



SP SERIES™ SIDEPULLERS™



DID YOU ANSWER YES TO ANY OF THESE QUESTIONS?



Then a SidePuller™ should be on your list of tools to purchase. With a SidePuller™ on your carrier or wrecker you will have the peace of mind of knowing that you'll be equipped to handle any towing and recovery situation.



316 W. Milwaukee St., PO Box 511
New Hampton, Iowa 50659

Call: 800-222-6047
Web: Zips.com

SP SERIES™ COMPARISON CHART

			
Model	SP9000™	SP9000™ (Integrated Controls)	
Part Number	ITD4518	ITD4670	
Boom Rating	9,000 lb.	9,000 lb.	
Winch Rating	9,000 lb.	9,000 lb.	
Wire Rope Size	3/8" x 100'	3/8" x 100'	
Free Spool	Manual (Easy Reach)	Manual (Easy Reach)	
Tie Back Anchor Points	10	10	
Wireless Remote Control For all Hyd Functions	No	Yes	
All Hydraulic Functions Pre Plumbed to SP Valve Body	No	Yes	
Requires Additional Hydraulic Valving / Controls	Yes	No	
Self Leveling Pavement Pads	Yes	Yes	
Fold Down Ground Penetrating Grousers	Yes	Yes	
Light Bar Mounting Base	Yes	Yes	
Polished Stainless Steel Rear Panel	Yes	Yes	
Removable Outer Recovery Boom Head	Yes	Yes	
Center Boom Head Can be Used For Recoveries	Yes	Yes	
Available Tuff Coat Black, or Primer Gray	Yes	Yes	
Min Recommended Chassis Height	32"	32"	
Max Recommended Chassis Height	38"	38"	
Minimum Recommended Chassis GVWR	15,000 lb.	15,000 lb.	
Maximum Recommended Chassis GVWR	26,000 lb.	26,000 lb.	
Shipping Weight (with shipping stand)	1,085 lb.	1,085 lb.	

**Look for the
SP Series™
Authorized
Distributor Seal**



SP SERIES™ SIDEPULLERS™



SP12,000™	SP12,000™ (Integrated Controls)	SP20,000™ (Integrated Controls)
ITD4710	ITD4711	ITD4700
12,000 lb.	12,000 lb.	20,000 lb.
12,000 lb.	12,000 lb.	20,000 lb.
7/16" x 100'	7/16" x 100'	9/16" x 150
Manual (Easy Reach)	Manual (Easy Reach)	Air Operated
8	8	8 (Removable-D-Ring (2) Std)
No	Yes	Yes
No	Yes	Yes
Yes	No	No
Yes	Yes	Yes
Yes	Yes	Yes
Optional	Optional	Optional
Not Available	Not Available	Not Available
Yes	Yes	Yes
Yes	Yes	Yes
Yes	Yes	Yes
36"	36"	40"
42"	42"	46"
26,000 lb.	26,000 lb.	30,000 lb.
33,000 lb.	33,000 lb.	55,000 lb.
1,525 lb.	1,575 lb.	2,300 lb.



316 W. Milwaukee St., PO Box 511
New Hampton, Iowa 50659

Call: **800-222-6047**

Web: **Zips.com**


SP SERIES™ SIDEPULLERS™



SP9000™

www.sidepuller.com

- NEW!** ADJUSTABLE MOUNTING PLATES
- NEW!** BOOM HEAD RECOVERY ANGLES
- NEW!** OUTER BOOM HEAD
- NEW!** TIE BACK SPRINGS
- NEW!** HAND HOLDS
- NEW!** LIGHT BAR MOUNT
- NEW!** LIGHT PYLONS
- NEW!** GROUND PENETRATING GROUSERS
- NEW!** SELF LEVELING PAVEMENT PADS
- NEW!** SELF CONTAINED HYD. SYSTEM
- NEW!** WIRELESS REMOTE
- NEW!** ACCENT PANEL

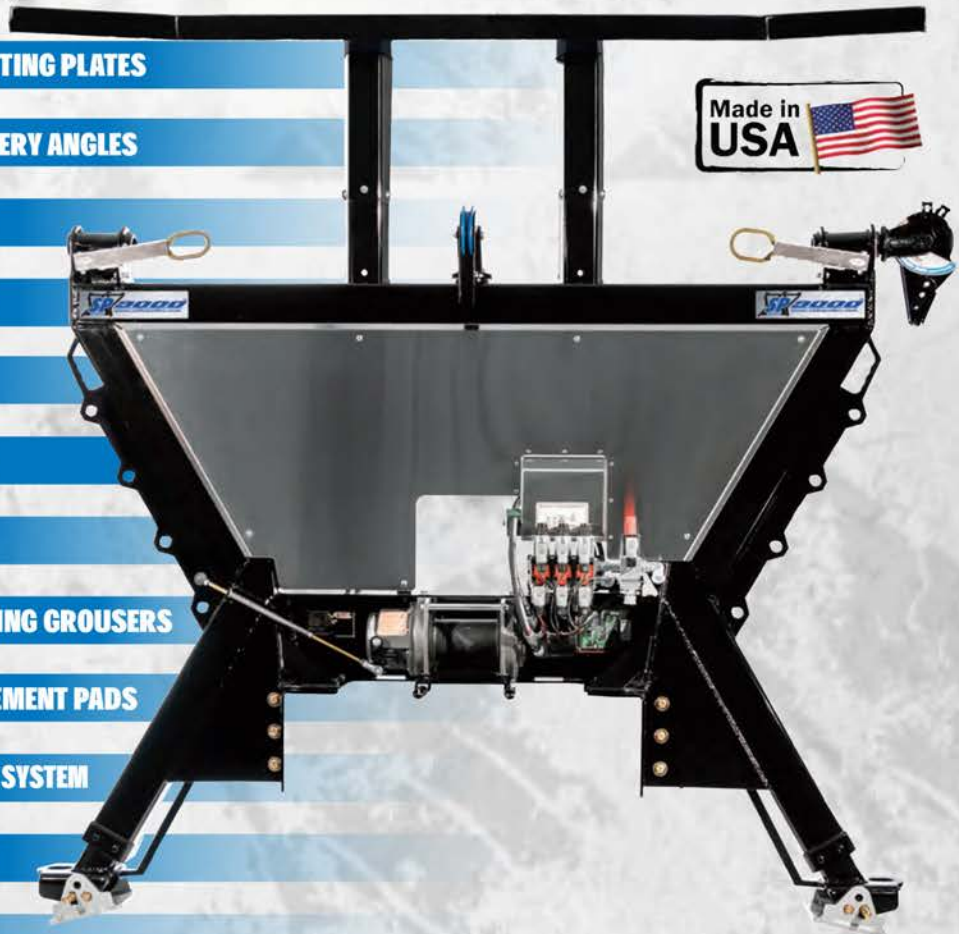

The SP9000™ is loaded with upgraded features and recovery capabilities. From our all new outer recovery boom heads, raised recovery points and angles of attack to a stainless steel rear accent panel.

The SP9000™ is also available with integrated wireless controls, which means it comes pre-plumbed and pre-wired, ready for installation. For those who want a more custom option, you can buy your SP9000™ without integrated controls. This option is great for those who ordered their carrier with SP controls factory installed. Without a doubt, the SP9000™ is the best SidePuller™ you can buy. When you buy a SidePuller™ it comes with the support of the entire In The Ditch Crew, and we want you to know we won't let you down.

The Nations #1 Selling SidePuller™ for over 15 Years

Standard Features SP9000™	
9,000 lb. WARN High Speed Planetary Winch	Hydraulic Stabilizer Legs with Lock Valve Safety Features
3/8" x 100 ft. Steel Core Wire Rope	Self Leveling Pavement Pads on Stabilizer Legs.
Winch Free Spool Handle (Easy Reach / Easy Pull)	Fold Down Ground Penetrating Grousers on Stabilizer Leg
Winch Tensioner Plate	Adjustable Light Bar Mount
(8) Eight Tie Back Points	Wire Routing System allows easy Wiring from Light Bar to Chassis
Tuff Coat Gloss Black Finish	Adjustable, Mounting System with Mounting Hardware
Prepped for User to Supply Hydraulic Valve / Control System	Center Recovery Boom Head
Stainless Steel Rear Panel	Outer Recovery Boom Head
SP9000™ (With Integrated Controls) Additional Standard Features	
Wireless Remote Control (1,000 ft. Range) for all Functions with Manual Over-rides	Completely Plumbed and Ready for Installation
Optional Features SP9000™	
SP Series™ Swept Wing Light Bar Pylon (Adjustable Height)	SP Series™ Model-54 Adjustable Height SP-Light Bar Pylon 54" Wide
SP Series™ Model-60 Adjustable Height SP-Light Bar Pylon 60" Wide	SP Series™ Model-70 Adjustable Height SP-Light Bar Pylon 70" Wide
Primer Gray, Ready for you to Paint Your Own Color	Stainless Steel Dress Up Package
Chassis Recommendation SP9000™	
Recommended Chassis GVWR	15,000 lb. - 26,000 lb.
Recommended Minimum Additional Cab to Axle Spacing (Carriers)	12"
Recommended Minimum Additional Cab to Axle Spacing (Wreckers)	20"
Min - Max Frame Height	32" - 38"
Min - Max Frame Width - Adjustable Mounting Base Width	33-3/4" to 34-3/4"

SP SERIES™ SIDEPULLERS™



SP12,000™

www.sidepuller.com



- NEW!** ADJUSTABLE MOUNTING PLATES
- NEW!** BOOM HEAD RECOVERY ANGLES
- NEW!** OUTER BOOM HEAD
- NEW!** TIE BACK SPRINGS
- NEW!** HAND HOLDS
- NEW!** GROUND PENETRATING GROUSERS
- NEW!** SELF LEVELING PAVEMENT PADS
- NEW!** SELF CONTAINED HYD. SYSTEM
- NEW!** WIRELESS REMOTE



The SP12,000™ was designed for those towers who want to add incredible side pulling recovery capabilities to their 12 to 16 ton wrecker or medium duty carrier. We started fresh with a larger platform, larger cylinders and a larger winch when we designed the SP12,000™. We made sure that all of the components were designed to take rated loads, day in and day out. For pulling power, we used a warn 12,000 lb. winch with a high speed two stage planetary gear system and equipped it with 100ft of 7/16" wire rope. The SP12,000™ comes standard with our hydraulic integrated valve system and a full wireless remote control that operates all of the functions. The SidePuller™ is an incredible recovery unit with virtually unlimited recovery abilities.



Perfect for Medium Duty Wreckers and Carriers

Standard Features SP12,000™	
12,000 lb. WARN High Speed Severe Duty Planetary Winch	Hydraulic Stabilizer Legs with Lock Valve Safety Features
7/16" x 100 ft. Steel Core Wire Rope	Self Leveling Pavement Pads on Stabilizer Legs.
Winch Free Spool Handle (Easy Reach / Easy Pull)	Fold Down Ground Penetrating Grousers on Stabilizer Leg
Winch Tensioner Plate	Adjustable Light Bar Mount
(8) Eight Tie Back Points	Wire Routing System allows easy Wiring from Light Bar to Chassis
Tuff Coat Gloss Black Finish	Adjustable SP Mounting Base and Hardware
Prepped for User to Supply Hydraulic Valve / Control System	Center Recovery Boom Head
Outer Recovery Boom Head	
SP12,000™ (With Integrated Controls) Additional Standard Features	
Wireless Remote Control (1,000 ft. Range) for all Functions with Manual Over-rides	Completely Plumbed and Ready for Installation
Optional Features SP12,000™	
Adjustable Light Bar Mounting Base (Factory Installed at ITD)	Adjustable Light Bar Mounting Base (Field Installed - Requires Welding)
SP Series™ Swept Wing Light Bar Pylon (Adjustable Height)	Primer Gray, Ready for you to Paint Your Own Color
SP Series™ Model-54 Adjustable Height SP-Light Bar Pylon 54" Wide	Stainless Steel Dress Up Package
SP Series™ Model-70 Adjustable Height SP-Light Bar Pylon 70" Wide	SP Series™ Model-60 Adjustable Height SP-Light Bar Pylon 60" Wide
Chassis Recommendation SP12,000™	
Recommended Chassis GVWR	26,000 lb. to 33,000 lb.
Recommended Minimum Additional Cab to Axle Spacing (Carriers)	16"
Recommended Minimum Additional Cab to Axle Spacing (Wreckers)	22"
Min - Max Frame Height	36" to 42"
Min - Max Frame Width - Adjustable Mounting Base Width	33-3/4" to 34-3/4"

SP SERIES™ SIDEPULLERS™



SP 20,000™

www.sidepuller.com

NEW!

OUTER BOOM HEAD

NEW!

TIE BACK SPRINGS

NEW!

ADJUSTABLE MOUNTING PLATES

NEW!

BOOM HEAD RECOVERY ANGLES

NEW!

GROUND PENETRATING GROUSERS

NEW!

SELF CONTAINED HYD SYSTEM

NEW!

SELF LEVELING PAVEMENT PADS

NEW!

HAND HOLDS

NEW!

WIRELESS REMOTE



The SP20,000™ is a great addition to your medium duty or heavy duty wrecker. It offers you ultimate pulling power off the side. The SP20,000™ has massive hydraulic stabilizers rated at 20,000lbs each that not only offer support when pulling from the SidePuller™, they also act as a second set of stabilizers during other recoveries. The SP20,000™ is equipped with a warn series 20XL high speed, 20,000lb. winch with air operated free spool. with the included wireless remote control and great recovery abilities, the SP20,000™ will prove over and over to you that it's a great recovery tool and will pay you back recovery after recovery.



Perfect for Heavy Duty Wreckers

Standard Features SP20,000™	
20,000 lb. WARN High Speed Severe Duty Planetary Winch	Hydraulic Stabilizer Legs with Lock Valve Safety Features
9/16" x 150 ft. Steel Core Wire Rope	Self Leveling Pavement Pads on Stabilizer Legs.
Air Operated Winch Free Spool Release	Fold Down Ground Penetrating Grousers on Stabilizer Leg
Winch Tensioner Plate	Wire Rope Hook Slide Tray
(8) Eight Tie Back Points (Removable D-Rings)	Tuff Coat Gloss Black Finish
(2) Removable D-RINGS	Wire Routing System allows easy Wiring from Light Bar to Chassis
Wireless Remote Control for all Functions with Manual Over-rides	Center Recovery Boom Head
Completely Plumbed and Ready for Installation	Outer Recovery Boom Head
Adjustable SP Mounting Base and Hardware	
Optional Features SP20,000™	
Adjustable Light Bar Mounting Base (Factory Installed at ITD)	Adjustable Light Bar Mounting Base (Field Installed - Requires Welding)
SP Series™ Swept Wing Light Bar Pylon (Adjustable Height)	Primer Gray, Ready for you to Paint Your Own Color
SP Series™ Model-54 Adjustable Height SP-Light Bar Pylon 54" Wide	Stainless Steel Dress Up Package
SP Series™ Model-60 Adjustable Height SP-Light Bar Pylon 60" Wide	Additional Removable D-Rings and Pins
SP Series™ Model-70 Adjustable Height SP-Light Bar Pylon 70" Wide	
Chassis Recommendation SP20,000™	
Recommended Chassis GVWR	30,000 lb. and Up
Recommended Additional Minimum Cab to Axle Spacing (Carriers)	24"
Recommended Additional Minimum Cab to Axle Spacing (Wreckers)	24" to 36" Depending on Accessibility to SP Winch
Min - Max Frame Height	40" to 46"
Min - Max Frame Width	33" to 35" (Requires Mounting Shims)

SP SERIES™ SIDEPULLERS™





SP SERIES™ SIDEPULLERS™



SEE THE FULL LINE OF PRODUCTS



In The Ditch™
TOWING PRODUCTS

**PRO SERIES™
TOOL BOX**

**OFTEN IMITATED.
NEVER DUPLICATED.**

ITD1570-B5-JB

www.intheditch.com

In The Ditch™
TOWING PRODUCTS

**PRO SERIES™
QUICK MOUNT**

NOW IN 4 SIZES!

ITD1580-GLV...20.5"
ITD1588-GLV...18.5"
ITD1584-GLV...16.5"
ITD1581-GLV...14.5"

**NEW!
GALVANIZED**

* ALSO AVAILABLE IN
TUFF COAT BLACK

www.intheditch.com

In The Ditch™
TOWING PRODUCTS

The SLS Speed Dolly™
U.S. Patent 7,427,799

ITD1490SLSP

MAINTENANCE MADE EASY

SPEED® LUBE SPINDLE™

* ADDITIONAL MODELS AVAILABLE

www.intheditch.com

In The Ditch™
TOWING PRODUCTS

CYCLE CADDY

**MOTORCYCLE RECOVERY
MADE EASY**

ITD1412

www.intheditch.com

In The Ditch™
TOWING PRODUCTS

**LOCKING SIMPLE
MOUNTS**

**NEW!
LOCKING
SYSTEM**

ITD1561
ITD1564
ITD1555

www.intheditch.com

In The Ditch™
TOWING PRODUCTS

**5TH WHEEL
POWER HITCH**

BE PREPARED

ITD1253

www.intheditch.com

In The Ditch™
TOWING PRODUCTS

TRASH CANS

NEW FOR 2016

6 gal
ITD1087

4 gal
ITD1086

www.intheditch.com

In The Ditch™
TOWING PRODUCTS

**MODULAR SPEED®
MOUNT**

**THE ULTIMATE DOLLY
MOUNTING SOLUTION!**

ITD4315
ITD4665

www.intheditch.com



316 W. Milwaukee St., PO Box 511
New Hampton, Iowa 50659

Call: **800-222-6047**

Web: **Zips.com**



SERIESTM
www.sidepuller.com



316 W. Milwaukee St., PO Box 511
New Hampton, Iowa 50659

Call: **800-222-6047**

Web: **Zips.com**



ITD0500