



MODEL 135 C / 150 C

FIXED GOOSENECK BEAVERTAIL



Long Beavertail Shown



Short Beavertail Shown



Proven Solutions for Your Hauling Needs!
1-800-428-5655 | www.landoll.com/trailers





Standard & Optional Equipment / Features

Model 135C / 150C Fixed Gooseneck Beavertail



S=Standard O=Optional

MODEL 150C	50 TON	100,000 lbs.		
MODEL 135C	35 TON	70,000 lbs.		
MAIN FRAME				
- Fabricated 80,000 and 100,000 PSI			S	S
- Four Beam Design			S	S
- Capacity - 70,000 lb. Distributed / 50,000 lb. Concentrated in 10'			S	
- Capacity - 100,000 lb. Distributed / 70,000 lb. Concentrated in 10'			S	
KINGPIN SETTING				
- 18" Setting / 84" Swing Clearance			S	S
CROSSMEMBERS				
- 4" Jr. I-Beam on 8" Centers			S	S
DECK AND FEATURES				
- Lower Deck Length			S	
135-27'3½", 29'3½", 32'3½"				S
150-29'3½", 32'3½"				S
- 102" Width			S	S
- 37½" Deck Height (Loaded)			S	S
- 1¾" Apitong Hardwood Deck (Lower Deck)			S	S
- 90° Slope Drop			S	S
- 13" Loaded Ground Clearance			S	S
WINCH				
- 12,000 lb. Worm Gear with Spring Tension and 85' of ½" Cable			O	O
- 20,000 lb. Worm Gear with Spring Tension and 85' of ¾" Cable			O	O
- 30,000 lb Warn Planetary 2-Speed with Air Release / Spring Tension with 85' of 5/8" Flex 9 Cable			O	O
TOOL BOX				
- Twin Lockable Upper Deck Mounted with Lockable Door (7" H x 34" W x 29" D)			S	S
- Lower Deck Lockable Tool Box (Curb Side or Street Side) (42" W x 28" D x 9" H)			O	O
TIE DOWNS / CHAIN GOTCHAS				
- Double Key Hole Chain Slots Located on 24" Centers			S	S
- "D" Ring Bolt-On at Winch (each) (Two Locations Available)			O	O
- Flush Mounted "D" Rings (each)			O	O
SLOPE RAMP				
- 5' Aluminum Ramps (Portable) 8,000 lb. Capacity Each			O	O
- 6' Upper Deck Ramp (Air Operated)			O	O
- Landoll Traction Ramps (Steel)			O	O
PARKING STANDS				
- Jost Two Speed Landing Gear			S	S
- Pin Drop (Lieu of Standard)			O	O
SUSPENSION / AXLES				
- Multi-Leaf Springs 45,000 lb. Capacity				S
- Multi-Leaf Springs 67,200 lb. Capacity H9700/60" Spread				S
- SAF-Holland / Neway Air Ride RLU228, 22,500 lb. Capacity			O	O
- (2) 25,000 Dual Tire, Oil Bath Bearings			S	
- (3) 25,000 Dual Tire, Oil Bath Bearings				S
BRAKES				
- 12.25x7.5 Full Air / Spring Brakes ABS, 4S2M			S	S
- 16.5x7 Full Air / Spring Brakes ABS, 4S2M			O	O
TIRES / RIMS				
- 235/75R 17.5 Double Coin Tires on 17.5x6.75 Tubeless Rims			S	S
- 255/70R 22.5 Double Coin Tires on 22.5x7.5 Tubeless Rims			O	O
- 255/70R 22.5 Michelin Tires on 22.5x7.5 Tubeless Rims			O	O
- Tire Inflation System			O	O
- Hubometer			O	O
HYDRAULIC HOOK UP				
- Hydraulic Quick Couplers 2,500 PSI - 20 GPM at Controls, 50 GPM Max			O	O
LIGHTS				
- Grote Clear Lens LED with Chrome Bezel (10 Year Warranty)			S	S
- Grote "Xtreme" Wiring Harness (7-Year Warranty)			S	S
- Center Mounted Side Turn Signal			S	S
FINISH / COLOR				
- Steel Grit Shot Blast to Bright Metal			S	S
- Zinc Rich Primer			S	S
- TGIC Polyester Powder Coat, White, Black, Yellow, Blue, Red, Green, Sapphire Blue, Dark Gray			S	S
RAMPS				
- 5' Self-Cleaning Adjustable Spring Assisted Flip-Over			S	S
- Heavy Duty Crawler Ramp (Wood Filled)			O	O
- Third Ramp--Self-Cleaning or Wood Filled			O	O
BEAVERTAIL				
- 68" Self-Cleaning Beavertail			S	S
- Apitong Wood Covered Beavertail			O	O
- Traction Bars for Wood Covered Beavertail			O	O
WEIGHT				
- 135-40 12,000 lbs. +/- 3%			S	
- 150-48 14,500 lbs. +/- 3%				S

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.

Call 1-800-428-5655

Proven Solutions for Your Hauling Needs!




www.landoll.com/trailers

1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779


Remember: Quality is Always a Bargain!

Scan for More!





GALVANIZING ***OPTION***
GALVANIZING
AVAILABLE ON ALL TRAILERS

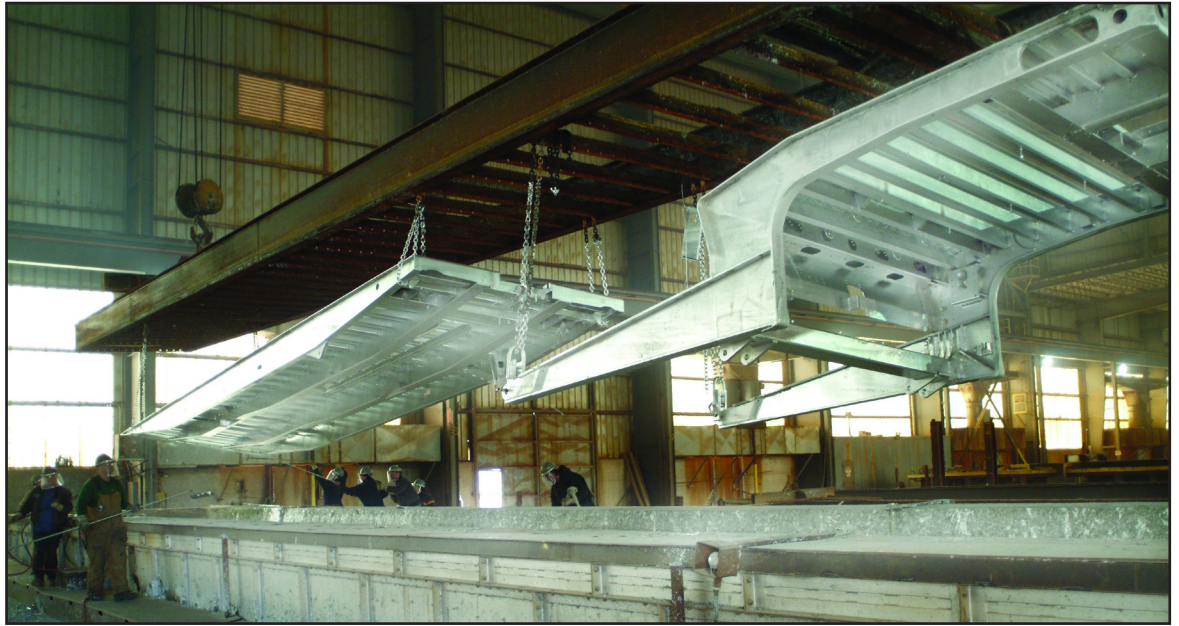

Proven Solutions for Your Hauling Needs!
1-800-428-5655 | www.landoll.com/trailers





Galvanizing Option for Corrosion Resistance



Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.

Call 1-800-428-5655

Proven Solutions for Your Hauling Needs!

www.landoll.com/trailers

1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779

Remember: Quality is Always a Bargain!

