



Proven Solutions for Your Hauling Needs! 1-800-428-5655 | www.landoll.com/trailers





Standard & Optional Equipment / Features

Model 326 / 327 / 329 Detachable Gooseneck



S=Standard O=Optional

MODEL 326	MODEL 326 35 TON 70,000 lbs.				
MODEL 327	50 TON	100,000 lbs.			
MODEL 329	60 TON	120,000 lbs.			
MAIN FRAME - Fabricated 16", 100,0 - Capacity - 70,000 lb.			s	s s	s s
- Capacity - 100,000 lb. in 16' - Capacity - 120,000 lb. in 10'					
KINGPIN SETTING - 15" for 84" Swing Clearance (10' 7" Neck) - 15" for 113" Swing Clearance / 42" for 86 Swing Clearance (13' Neck)				s O	s
CROSSMEMBERS - 8" High Tensile I-Beams on 24" Centers - 8" High Tensile I-Beams on 20" Centers				s	s
GOOSENECK, DECK & ACCESSORIES - 10'7" - 13" Gooseneck with 86" and 113" Swing Clearance				s O	s
 - 13' HD with Provision for Flip Ext. - 102" Wide - 8" Loaded Ground Clearance - 24" Loaded Deck Height - Fifth-Wheel Type Automatic Gooseneck Lock with Lock / Unlock Visual from Tractor 					S S S S
- Centralized Grease S - Automatic Slack Adju Rail Stiffeners - Ramp Brackets and - Boom Trough - Front Bolsters - Swing-Out Riggers	isters		S S S S S S O	S S S S S S O	\$ \$ \$ \$ \$ \$ \$ 0
TIE DOWNS / CHAIN GOTCHAS - 8 "D"-Rings - 10 "D"-Rings				S	s
STORAGE ARE - 41"W x 24"L x 10"D E - 41"W x 20"L x 10"D E	Between Main Frame	-	s	s	s

MODEL 326	35 TON	70,000 lbs.					
MODEL 327	50 TON	100,000 lbs.					
MODEL 329	60 TON	120,000 lbs.					
SUSPENSION / AXLES - SAF-Holland / Neway Air Ride (RLU250) 25,000 lb. Capacity - (2) 25,000 lb. Dual Tire, Oil Bath Bearings - (3) 25,000 lb. Dual Tire, Oil Bath Bearings S					s s		
BRAKES - 16.5x7 Full Air / Spring Brakes ABS, 4S2M / Center Axle Indirect					s		
TIRES / RIMS - 255/70R 22.5 LRH Radial - 295/75R 22.5 LRG Radial - 22.5x8.25 10-Bolt Hub Pilot				s s	s s		
HYDRAULIC HOOK UP - Hydraulic Quick Couplers / 2,500 PSI - 15 GPM					s		
LIGHTS - Grote LED (10-Year W - Grote "Xtreme" Wiring	• /	nty)	s s	s s	s s		
FINISH / COLOR - Steel Grit Shot Blast to - Zinc Rich Primer - TGIC Polyester Power Green, Sapphire Blue,	ler Coat White, Black, Y	/ellow, Blue, Red,	S S S	s s s	S S S		
WEIGHT (ESTIMATED) - 13,250 lbs. (44') +/- 3% - 18,900 lbs. (48') +/- 3% - 22,500 lbs. (51') +/- 3%				S	s		
MORE OPTIONS AVAILABLE CONSULT FACTORY							

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.








Proven Solutions for Your Hauling Needs! 1-800-428-5655 | www.landoll.com/trailers





Galvanizing Option for Corrosion Resistance



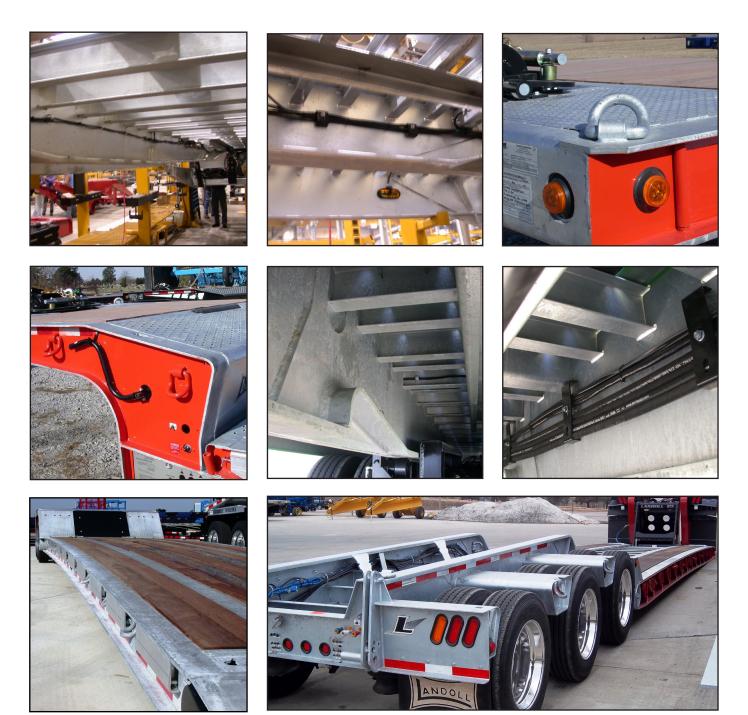

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.

Call 1-800-428-5655 Proven Solutions for Your Hauling Needs! VVVVV.Iandoll.com/trailers 1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779 Remember: Quality is Always a Bargain!

