



MODEL 330 CONTAINER TRAILER



- Heavy duty frame and undercarriage are built for many years of rugged service and strong enough to haul other rental equipment or automotive vehicles.



- Jost 2-Speed Crank Down Landing Gear



- The standard four strap winches with opposing hooks and 4 "D" ring tie downs are conveniently located for efficiently securing the container.




- The rugged approach plate quickly lifts and then aligns the container for loading.



- The 12,000 lb. worm gear winch is standard equipment.
- Adjustable container stops offer flexibility to haul various lengths of containers.



- Conveniently located hydraulic controls are easy to understand and provide safe operation.
- The optional self-contained engine hydraulics supply all hydraulic power needed for full operations of the trailer function (not pictured).

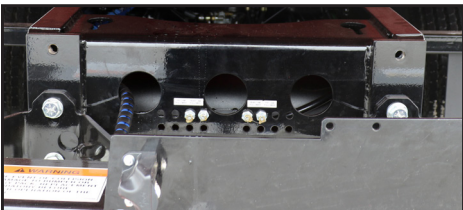

- Centralized Grease System



- Left Side Tool Box 42"W x 28"D x 9H



- 4 "D" Rings, 4 Rachets with Hooks

Proven Solutions for Your Hauling Needs!
1-800-428-5655 | www.landoll.com/trailers





Standard & Optional Equipment / Features

Model 330 Container Trailer



S=Standard O=Optional

MODEL 330-2	25 TON	50,000 lbs.
MODEL 330-1	8 TON	16,000 lbs.
MAIN FRAME		
- Fabricated 80,000 PSI Yield Beams	S	S
- Capacity - 16,000 lbs. Distributed 10,000 lbs. Concentrated in 10'	S	
- Capacity - 50,000 lbs. Distributed 20,000 lbs. Concentrated in 10'		S
KINGPIN SETTING		
- 30" Setting / 72" Swing Clearance	S	S
- 18" Setting on 90° Drop / 72" Swing Clearance	S	S
- 24" Setting / 77½" Swing Clearance		
CROSSMEMBERS		
- 3½" x 3½" Tube on 18" Centers	S	S
DECK AND ACCESSORIES		
- 42' Overall Length	S	S
- 102" Width	S	S
- 44½" Deck Height (Loaded)(Spring Ride)(Single Axle)(At Rear Axle)	S	S
- 47" Deck Height (Loaded)(Air Ride)(Tandem Axle)(At Rear Axle)	S	S
- ⅛" Steel Tread Plate, 5" Cable Trough - Full Length	S	S
Formed Angle Skid Plate / Side ⅝" x 12" x 3-½"		
- 12° Load Angle	S	S
- 90° Drop in Lieu of Straight	O	O
- Under Deck Tool Box (42"x28"x9")	O	O
- 29" Approach Plate with (4) Keyhole Tie Downs	S	S
- 1 Pair Adjustable Container Stops on Straight Trailer	S	S
- Light for Hydraulic Controls	O	O
- Centering Boards (2 Front, 2 Rear)	O	O
WINCHES AND ACCESSORIES		
- Worm Gear 12,000 lb. with 85' of ½" Cable	S	S
- Worm Gear 20,000 lb. with 85' of ⅝" Cable	O	O
- Wireless Remote Control	O	O
- Cable Roller Guide for Winch	O	O
- Slope Roller (Recommended for 90° Drop)	O	O
TIE DOWNS / CHAIN GOTCHAS		
- (4) "D" Rings - 2-Per Side, (4) 4" Strap Ratchets Curbside with Opposing Hooks Street Side	S	S
- Extra Flush Mounted "D" Rings	O	O
- Extra Ratchet Winch for 4" Nylon Strap - Weld On (Less Straps)	O	O
BULKHEADS		
- 16" / 24" 2-Position Bulkhead / Front Extension (Solid)	O	O
- 48" High Mesh, 102" Width	O	O
- Bolt-On Binder Storage Rack for 48" Bulkheads	O	O
- LED Work Light - Dual (Mounted on Bulkhead)	O	O
- Spare Tire Carrier 48" Bulkhead Front Mount	O	O
- Spare Tire Carrier 48" Bulkhead Rear Mount	O	O
- Dual Spare Tire Carrier 48" Bulkhead Front Mount	O	O

MODEL 330-2	25 TON	50,000 lbs.
MODEL 330-1	8 TON	16,000 lbs.
PARKING STANDS		
- Pin Drop		O
- Two Speed Crank Down Landing Gear		S
AXLES		
- (1) 25,000 lbs. Dual Tires, Oil Bath Bearings	S	
- (2) 25,000 lbs. Dual Tires, Oil Bath Bearings		S
SUSPENSION		
- Transpro Mono Leaf 22,000 lb. Capacity per Axle	S	S
- Air Ride in Lieu of Spring	O	O
- Low Load Angle 9½° *(48' Only)	O	O
BRAKES		
- 16.5x7 Full Air / Spring Brakes, ABS 2S1M	S	
- 16.5x7 Full Air / Spring Brakes, ABS 4S2M		S
- Steel Out Board Brake Drums	S	S
OIL SEAL HUBS / RIMS		
- Internal Mated Assembly	S	S
- 22.5x8.25 Tubeless 10-Hole Hub Pilot Disc Type	S	S
TIRES		
- 255/70R 22.5 Double Coin	S	S
- 255/70R 22.5 Michelin in Lieu of Standard Spare Tires and Rims Available in Standard & Optional Sizes	O	O
WHEEL ACCESSORIES		
- Hubometer		O
HYDRAULIC POWER SOURCE		
- Quick Couplers / 2,500 PSI - 20 GPM at Controls, 50 GPM Max	S	S
- Air Shift PTO and Wet Kit for Tractor - Not Installed	O	O
- 25 HP Engine Pkg. (Upper Deck Mounted with Cover)	O	O
AIR / ELECTRICAL CONNECTION		
- Glad Hand / 7-Way Receptacle	S	S
LIGHTS		
- Grote Clear Lens LED with Chrome Bezel (10 Year Warranty)	S	S
- Grote "Xtreme" Wiring Harness (7-Year Warranty)	S	S
- Center Mounted Side Turn Signal	S	S
FINISH / COLOR		
- Steel Grit Shot Blast to Bright Metal	S	S
- TGIC Polyester Powder Coat White, Black, Yellow, Blue, Red, Green, Sapphire Blue, Dark Gray	S	S
WEIGHT		
- 42' - Consult Factory	S	S
- 48' - Consult Factory	S	S

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.

Call 1-800-428-5655

Proven Solutions for Your Hauling Needs!




www.landoll.com/trailers

1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779


Remember: Quality is Always a Bargain!

Scan for More!





GALVANIZING ***OPTION***
GALVANIZING
AVAILABLE ON ALL TRAILERS



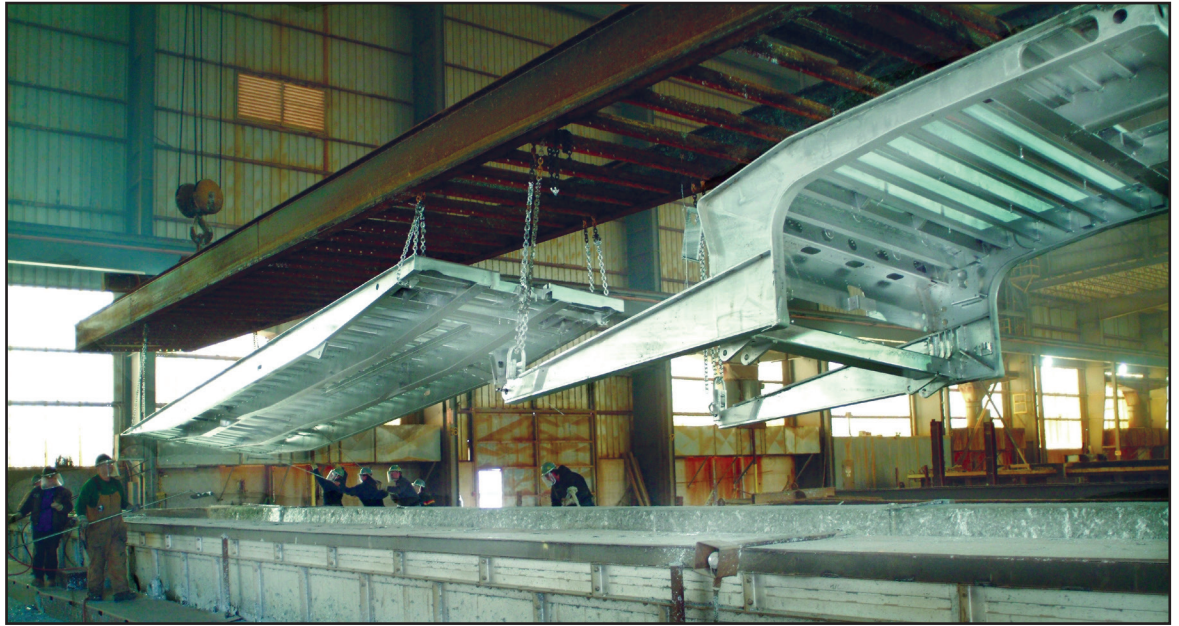


Proven Solutions for Your Hauling Needs!
1-800-428-5655 | www.landoll.com/trailers





Galvanizing Option for Corrosion Resistance

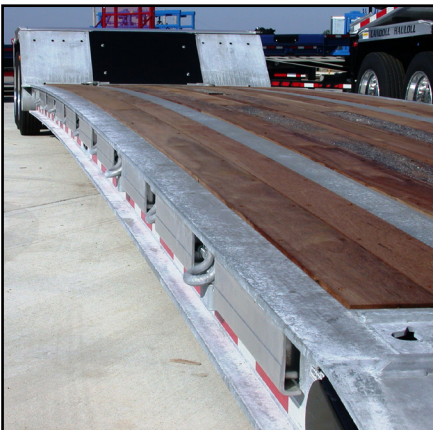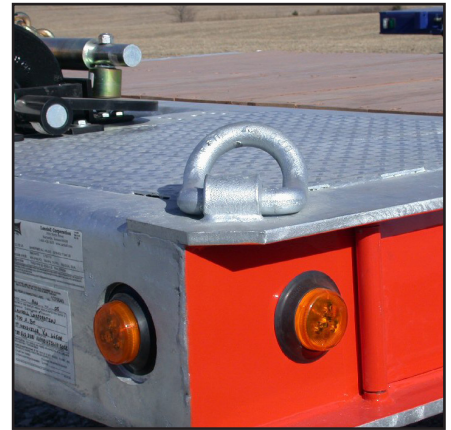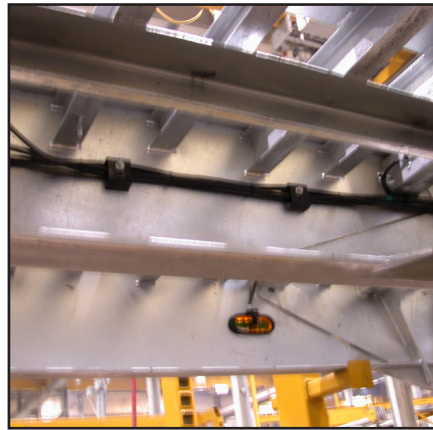

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.

Call 1-800-428-5655

Proven Solutions for Your Hauling Needs!

www.landoll.com/trailers

1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779

Remember: Quality is Always a Bargain!

