



MODEL 835 E / 855 E PAVER SPECIAL TRAILER



Standard Front Ramps
in Transport Position



Standard Easy Fold Ramps
in Load Position



Optional Lights Shown

Proven Solutions for Your Hauling Needs!
1-800-428-5655 | www.landoll.com/trailers





Standard & Optional Equipment / Features

Model 835E-PS / 855E-PS Detachable Gooseneck Trailer



S=Standard O=Optional

MODEL 855E-PS	55 TON	110,000 lbs.
MODEL 835E-PS	35 TON	70,000 lbs.
MAIN FRAME		
- Fabricated 11 $\frac{3}{8}$ " Beam, 100,000 PSI	S	
- Fabricated 13" Beam, 100,000 PSI		S
KINGPIN SETTING		
- 15"	S	
CROSSMEMBERS		
- 6" High Tensile I-Beams on 21 $\frac{3}{8}$ " Centers	S	
- 8" High Tensile I-Beams on 24" Centers		S
GOOSENECK, DECK AND ACCESSORIES		
- 3rd Axle Ready	S	
- 4th Axle Ready		S
- 12" Swing-Out Outriggers	S	S
- Rear Trunnion Wheel Areas Covered	S	S
- HD Sloped Front Approach	S	S
- Open Boom Trough with "V" Type Bumper	S	S
- Three Pair Flag Holders	S	S
- Centralized Grease System - All Axles	S	S
- Front Ramps Track Area (61" Bi-Fold, 25 lb. Lift Spring Assist, 6° Load Angle)	S	S
DECK AND FEATURES		
- 102" Wide	S	S
- 1 $\frac{1}{2}$ " Nominal Apitong Fully Covered Lower Deck	S	
- 2" Nominal Apitong Fully Covered Lower Deck		S
LIFT CYLINDERS		
- Horizontally Mounted	S	S
SWING CLEARANCE		
- 84"	S	
- 90" and 108"		S
LOADED GROUND CLEARANCE		
- 6.5"	S	
- 6"		S
LOADED MAIN DECK HEIGHT		
- 18" Front to 24" Rear	S	
- 19"		S
TIE DOWNS / CHAIN GOTCHAS		
- (22) Total, All Angled "D" Rings, 9 Each Side Lower Deck, 1 on the End of Middle Bolster, 2 at Rear of Trunnion (53' Trailer)	S	
- (16) Total, "D" Rings, 6 Each Side Lower Deck, 1 on the End of Middle Bolster, 2 at Rear of Trunnion (53' Trailer)		S

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.

MODEL 855E-PS	55 TON	110,000 lbs.
MODEL 835E-PS	35 TON	70,000 lbs.
STORAGE AREA		
- (1) Right Side Transition from Lower Deck to Trunnion Deck (28" W x 16" L x 5" D)	S	S
SUSPENSION / AXLES		
- Neway Air Ride, 25,000 lb. Capacity with Mechanical Ride Height Control Valve	S	S
- (2) 25,000 lb. Dual Tire, Oil Bath Bearings	S	
- (3) 25,000 lb. Tandem Dual Tire, Oil Bath Bearings		S
- 50" Spacing	S	S
- 54" Spacing		S
- Automatic Slack Adjusters - All Axles	S	S
BRAKES		
- 16.5x7 Full Air with Spring Brakes ABS 4S2M	S	S
TIRES / RIMS		
- 255/70R 22.5 LRH	S	S
- 22.5 x 8.25	S	S
- Hub Pilot / Steel Outboard Brake Drums	S	S
HYDRAULIC HOOK UP		
- Hydraulic Quick Couplers 2,500 PSI - 20 GPM at Controls, 50 GPM Max	S	S
LIGHTS		
- Grote Clear Lens LED with Chrome Bezel (10-Year Warranty)	S	S
- Grote "Xtreme" Wiring Harness (7-Year Warranty)	S	S
FINISH / COLOR		
- Steel Grit Shot Blast to Bright Metal / 400° Bake	S	S
- Zinc Rich Powder Primer	S	S
- TGIC Polyester Powder Coat White, Black, Yellow, Blue, Red, Green, Sapphire Blue, Dark Gray	S	S
WEIGHT (BASE)		
53' - 835-PS - 19,820 lbs. +/- 3%	S	
53' - 855-PS - 24,800 lbs. +/- 3%		S
ESTIMATED WEIGHTS		

Optional:

Center Ramp in Load Position



Call 1-800-428-5655

Proven Solutions for Your Hauling Needs!

www.landoll.com/trailers

1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779


Remember: Quality is Always a Bargain!

Scan for More!





GALVANIZING ***OPTION***
GALVANIZING
AVAILABLE ON ALL TRAILERS

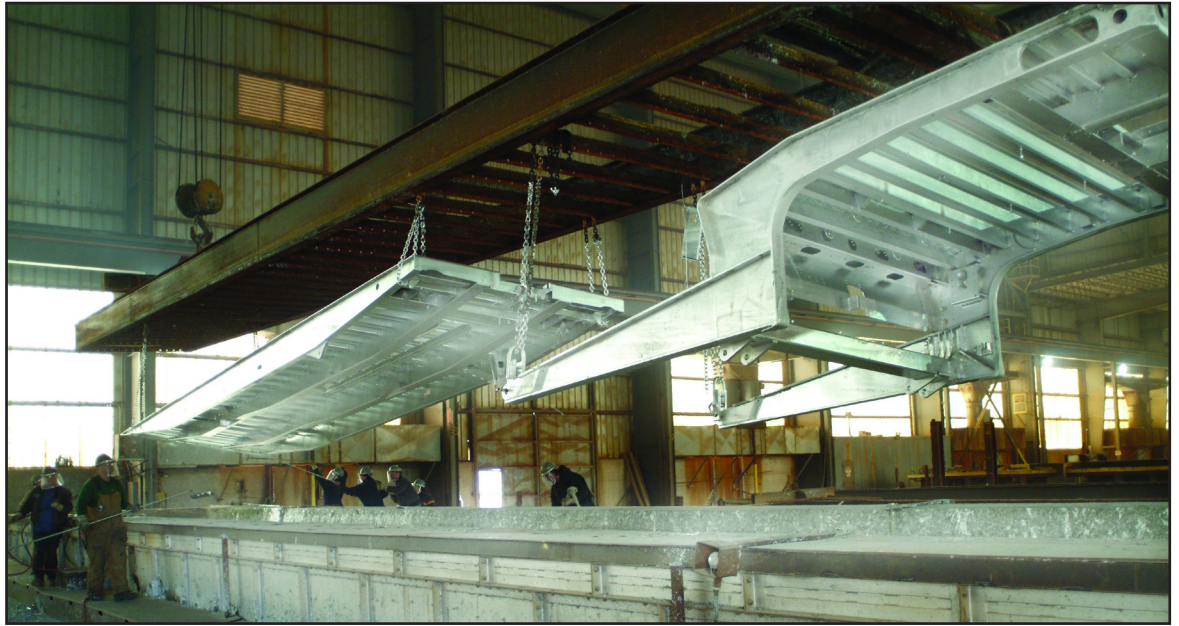

Proven Solutions for Your Hauling Needs!
1-800-428-5655 | www.landoll.com/trailers





Galvanizing Option for Corrosion Resistance



Call 1-800-428-5655

Proven Solutions for Your Hauling Needs!

www.landoll.com/trailers

1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779

Remember: Quality is Always a Bargain!

Scan for More!

