



UTILITY TAG TRAILERS




Tilt Cylinder and Frame



Low Load Angle



Gooseneck Connected to Hitch

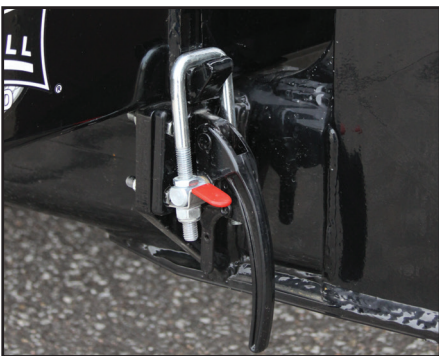

Heavy Duty Bed Lockdown



Light Bar and Landoll Traction Plate



Tie Downs

Proven Solutions for Your Hauling Needs!
1-800-428-5655 | www.landoll.com/trailers





Standard & Optional Equipment / Features

Utility Tag Trailers



Model	LT1422A	LT1420A	LT1220A	LT1216A+4	LT1020A	LT1016A+4	LT1016A
Load Capacity (lbs.)	14,000	14,000	12,000	12,000	10,000	10,000	10,000
GVWR (lbs.)	18,700	18,400	15,900	15,700	13,600	13,200	12,700
Estimated Base Weight (lbs.)	4,700	4,400	3,900	3,700	3,600	3,200	2,700
Platform Length	22' Tilt	20' Tilt	20' Tilt	20' 16' Tilt + 4' Stationary	20' Tilt	20' 16' Tilt + 4' Stationary	16' Tilt
Width O.A.	102"	102"	102"	102"	102"	102"	102"
Width Between Fenders	82½"	82½"	80"	80"	80"	80"	80"
Load Angle +/-	9.7°	11.8°	11.4°	11.4°	11.4°	11.4°	12.4°
Decking	2" CA-B Copper Azole Treated Pine	2" CA-B Copper Azole Treated Pine	2" CA-B Cooper Azole Treated Pine	2" CA-B Copper Azole Treated Pine	2" CA-B Copper Azole Treated Pine	2" CA-B Copper Azole Treated Pine	2" CA-B Copper Azole Treated Pine
Loaded Deck Height	22"	22"	22"	22"	22"	22"	22"
Mainframe	7" Channel	7" Channel	6" Channel	6" Channel	6" Channel	6" Channel	6" Channel
Crossmembers	12" Centers 4" Jr I-Beams	12" Centers 4" Jr I-Beams	24" Centers 4" Jr I-Beams	24" Centers 4" Jr I-Beams	24" Centers 4" Jr I-Beams	24" Centers 4" Jr I-Beams	24" Centers 4" Jr I-Beams
Suspension	Torflex	Torflex	Torflex	Torflex	Torflex	Torflex	Torflex
Axles	2 - 8,000 lbs. EZ-Lube	2 - 8,000 lbs. EZ-Lube	2 - 7,000 lbs. EZ-Lube	2 - 7,000 lbs. EZ-Lube	2 - 6,000 lbs. EZ-Lube	2 - 6,000 lbs. EZ-Lube	2 - 6,000 lbs. EZ-Lube
Brakes	Electric	Electric	Electric	Electric	Electric	Electric	Electric
Wheels	Steel 8-Bolt Pattern	Steel 8-Bolt Pattern	Steel 8-Bolt Pattern	Steel 8-Bolt Pattern	Steel 8-Bolt Pattern	Steel 8-Bolt Pattern	Steel 8-Bolt Pattern
Tires	215/75R x 17.5 LRH	215/75R x 17.5 LRH	235/80R 16 LRE	235/80R 16 LRE	235/80R 16 LRE	235/80R 16 LRE	235/80R 16 LRE
Hitch Type	3" Pintle Eye	3" Pintle Eye	2½" Ball or 3" Pintle Eye	2½" Ball or 3" Pintle Eye	2½" Ball or 3" Pintle Eye	2½" Ball or 3" Pintle Eye	2½" Ball or 3" Pintle Eye

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.

Call 1-800-428-5655

Proven Solutions for Your Hauling Needs!

www.landoll.com/trailers


1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779

Remember: Quality is Always a Bargain!





GALVANIZING ***OPTION***
GALVANIZING
AVAILABLE ON ALL TRAILERS

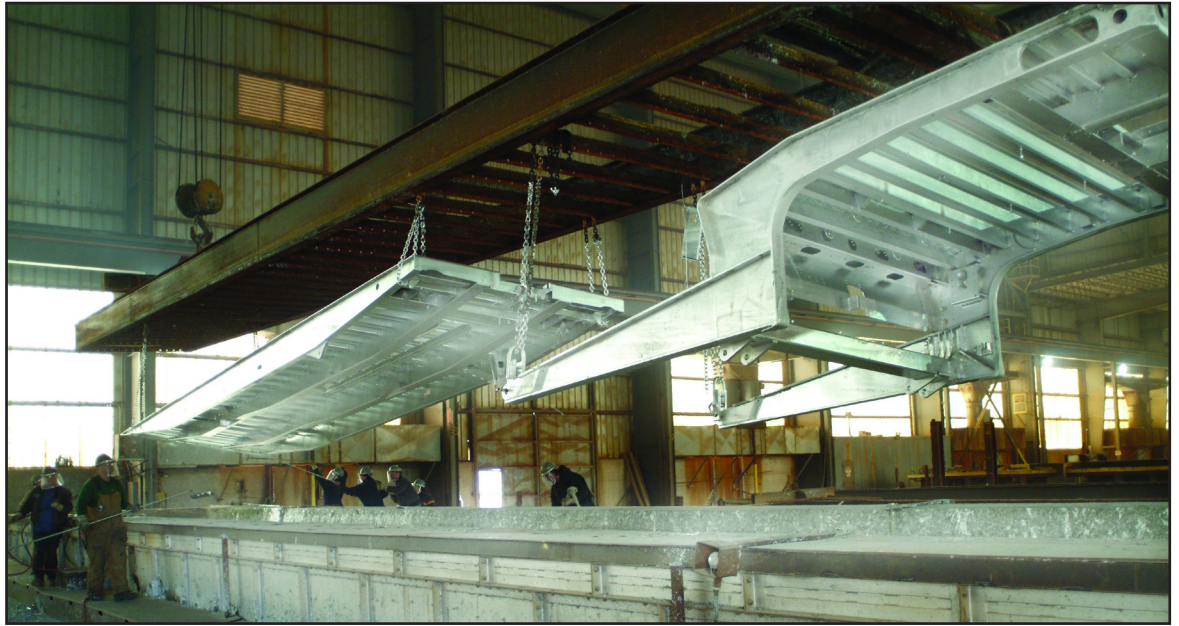

Proven Solutions for Your Hauling Needs!
1-800-428-5655 | www.landoll.com/trailers





Galvanizing Option for Corrosion Resistance



Call 1-800-428-5655

Proven Solutions for Your Hauling Needs!

www.landoll.com/trailers

1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779

Remember: Quality is Always a Bargain!

Scan for More!

