




# **MODEL LT1016 A +4 / LT1020 A UTILITY TAG TRAILER**



A full width rear light bar for added safety protection with machined safety approach plate.

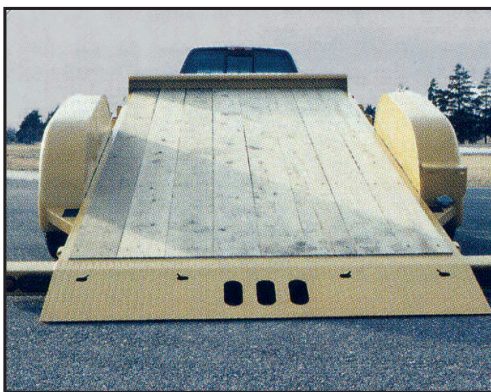

The Landoll tilt control system and the 2½" x 16" cushion cylinder can hold the deck in a tilted position or smoothly return the deck to transport position.

**Proven Solutions for Your Hauling Needs!**  
**1-800-428-5655 | [www.landoll.com/trailers](http://www.landoll.com/trailers)**





# Standard & Optional Equipment / Features

## Model LT1016A+4 / LT1020A Utility Tag Trailer



S=Standard O=Optional

### MODEL LT1020 A TILT DECK

### MODEL LT1016 A +4 TILT DECK

#### DIMENSIONS

- 16' Flat Deck and 4' Stationary
- 20' Flat Deck
- 22" Loaded Deck Height
- 80" Wide Between Fenders
- 102" O/A Width

S S  
S S  
S S  
S S

#### CAPACITY

- 10,000 lbs.
- Trailer Weight 3,600 lbs. LT1020 A
- Trailer Weight 3,200 lbs. LT1016 A+4
- GVWR 13,600 lbs. LT1020 A
- GVWR 13,200 lbs. LT1016 A+4

S S  
S S  
S S  
S S

#### MAIN FRAME

- 6" Channel
- 4" Jr. I-Beam Crossmembers
- 6" Channel Hitch Frame
- Tool Box Under Deck
- 24" Centers on Crossmembers
- 12" Centers on Crossmembers (Required for Forklifts)

S S  
S S  
S S  
S S  
S S  
O O

#### AXLES

- (2) 6,000 lb. Torflex, E-Z Lube

S S

#### TIRES AND BRAKES

- LT235/80R 16LRE
- 12" x 2" Electric Brakes

S S  
S S

#### DECK

- 2" Nominal CA-B Cooper Azole Treated Pine
- (6) 5/8" D-Rings
- (4) 5/8" D-Rings
- Stake Pockets 4 per Side
- Sideboards

S S  
S S  
S S  
S S  
O O

#### TILT DECK


- 2 1/2" x 16" Cushion Cylinder
- Tilt Control Valve System
- Approach Plate Landoll Traction Plate
- Load Angle 11.4°

S S  
O S  
S S  
S S

#### ACCESSORIES

- Fenders - HD 14 Gauge with Back
- Steps with Anti-Skid Tape
- 8,000 lb. Ramsey Electric Winch
- Spare Tire Carrier

S S  
S S  
O O  
O O

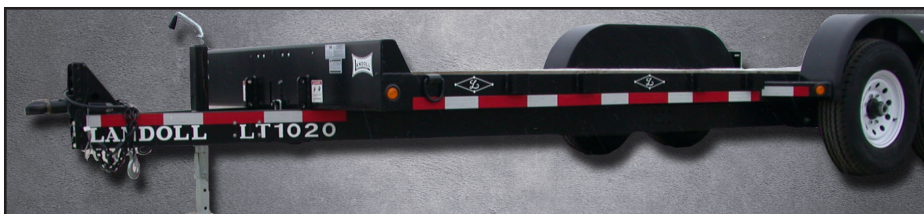

A 6" channel iron frame under the main frame for superior strength. A solid formed 6" height headboard for protection. (Stake pockets shown for optional removable sideboards)



Adjustable hitch 12" to 24" vertically, plus 7,000 lb. drop leg jack are standard equipment.



Loading angle as low as 11.4°.



A heavy-duty bed lock-down with safety latch firmly secures the bed in transport position.



Exclusive Landoll traction plate for superior traction while loading rubber tired and small wheeled equipment on the approach plate.

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.

**Call 1-800-428-5655**

**Proven Solutions for Your Hauling Needs!**

**[www.landoll.com/trailers](http://www.landoll.com/trailers)**

1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779

**Remember: Quality is Always a Bargain!**




Scan for More!







***GALVANIZING*** ***OPTION***  
***GALVANIZING***  
***AVAILABLE ON ALL TRAILERS***

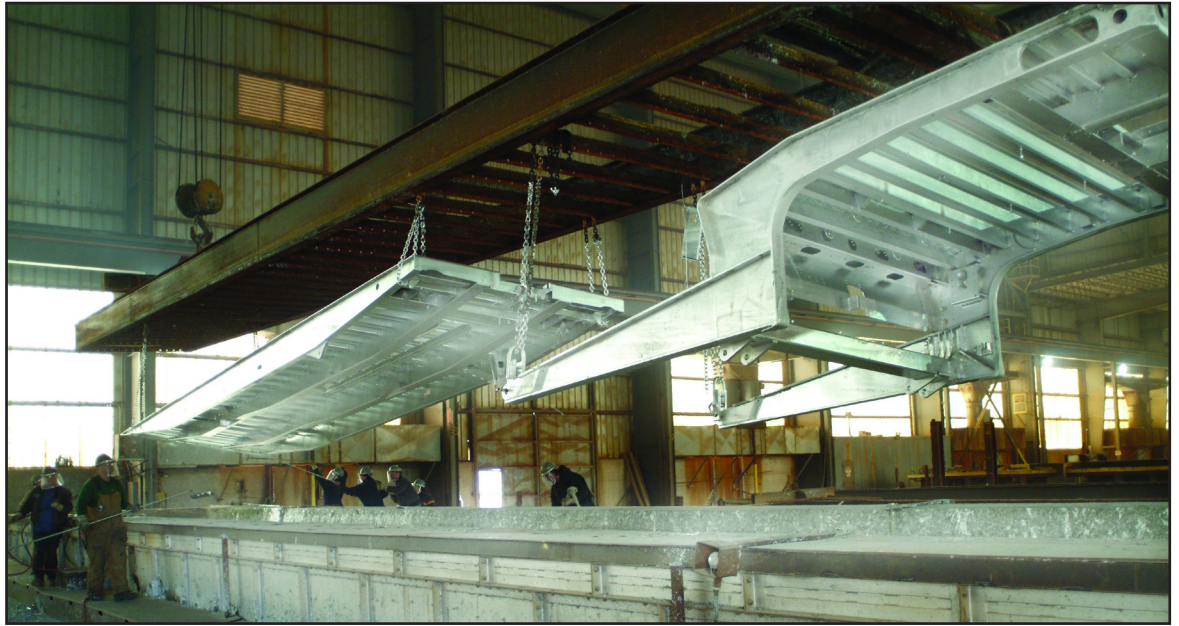

***Proven Solutions for Your Hauling Needs!***  
***1-800-428-5655 | [www.landoll.com/trailers](http://www.landoll.com/trailers)***







## Galvanizing Option for Corrosion Resistance



**Call 1-800-428-5655**

***Proven Solutions for Your Hauling Needs!***

***www.landoll.com/trailers***

1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779

***Remember: Quality is Always a Bargain!***

*Scan for More!*

