

XL DOLLY



XL 6 Axle Dolly

YOUR SOLUTIONS-BASED HAULING PARTNER



XL 4 Axle Dolly

SUPERIOR VERSATILITY

With a **140° total load platform travel** and **38" load platform height**, these Dollies transport Bridge beams, pre-stressed concrete abutments, crane booms and asphalt plant chimney's, among other materials.



XL 4 Axle Dolly

BUILT TO LAST

Built with XL's **one-piece construction process** results in stronger products. I-beams made from one piece web and flange and then welded on all sides. Built with proven XL quality, the XL Dolly will stand up to your hauling challenges.



XL 3 Axle Dolly

UNMATCHED EFFICIENCY

XL Dollies are designed to steer efficiently. **Load actuated progressive front axle steering** provides greater maneuverability and allows you to handle 18° turns sturdily. Front and rear axle steering is available.


BUILT WITH YOU IN MIND

- Large 34" x 96" load platform
- Load platform has 70° travel in each direction for maximum over-steer capability.
- 38" load platform height allows for taller loads.
- 140° total load platform travel
- Pivoting load platform can be hydraulically raised to 48" while fully loaded (with hydraulic hatbox option)
- Manual selector valve for towing permits steering axles to float without disconnected linkage.
- Pintle hook tow bar for transport
- All XL Specialized Trailers' products go through the new, premium paint process. XL paint includes a **full 1 year warranty**.
- Always striving to surpass market standards, all XL Specialized Trailers' products feature a **5 year structural warranty**.

FIND YOUR SPECIALIZED SOLUTION TODAY

visit xlspecializedtrailer.com

XL DOLLY

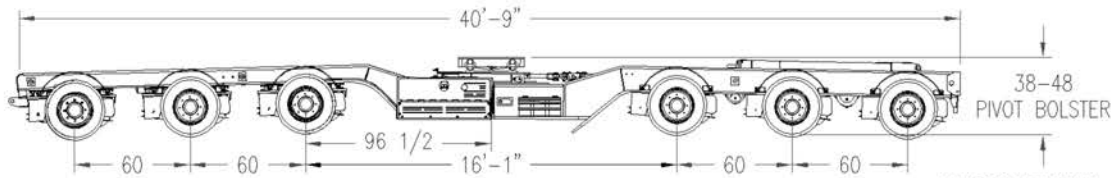

XL 120 DOLLY
CAPACITY: 120,000 LB
OAL: 40' 9" | OAW: 102"

SPECS

FRONT AXLE GROUP

120" WIDE
60" AXLE SPACING
4" LOAD CLEARANCE
AXLES MOUNTED ON TURNABLES
AXLES LINKED FOR PROGRESSIVE STEERING
50° TOTAL TURN ANGLE AT 2ND AXLE
TOW BAR LUGS ON FRONT AXLE

LOAD BOLSTER AREA

38" LOADED BOLSTER HEIGHT
6" LOADED GROUND CLEARANCE
16' 1" BETWEEN 3RD AND 4TH AXLES
34" X 96" LOAD PLATFORM
140° TOTAL LOAD BOLSTER ROTATION
LOAD BOLSTER HYDRAULICALLY LINKED TO STEER AXLES
ADJUSTABLE STEERING LINKAGE

REAR AXLE GROUP

120" WIDE
60" AXLE SPACING
4" LOAD CLEARANCE
FLAG HOLDERS

SUSPENSION

25,000 LB AIR RIDE
RAISE AND LOWER VALVE
MANUAL RIDE HEIGHT CONTROL ON FRONT AND REAR

WHEELS AND TIRES

6.75 X 17.5 STEEL RIMS
245 / 70R / 17.5 TIRES

AXLES

(3) 30,000 LB NOMINAL
60" SPACING
HUB PILOT, OUTBOARD DRUMS
NO ABS - SPRING BRAKES ON 3 AXLES
1 1/4 X 7 1/2" BRAKES

LIGHTING

D.O.T. APPROVED 12V SEALED GROTE HARNESS
RUBBER MOUNTED LED LIGHTS
(1) MID-TURN SIGNAL PER SIDE
(2) CLEARANCE LIGHT PER SIDE
7 POLE ELECTRICAL SOCKET
2 TAIL LIGHT PACKAGE WITH ALUMINUM COVER

NEW INDUSTRY-LEADING PAINT PROCESS

1 YEAR WARRANTY
BLACK, IH RED, OR NEW CAT YELLOW
AIR & ELECTRIC DONE AFTER

AVAILABLE MODELS

XL 120 DOLLY
XL -2 +2 DOLLY
XL -3 +3 DOLLY
OTHER CUSTOM CAPACITIES AVAILABLE

OPTIONS



Plastic wheel covers



PSI tire inflation system

POPULAR OPTIONS

Hydraulic hatbox load bolster
Remote control for manual override steering
Plastic wheel covers
Hubometer
Various lighting options
Diamond plated decking
Aluminum/polished wheels
PSI tire inflation system
Many more available