



XL FLAT DECK EXTENDABLE



FEATURES

- Available in 48-foot or 53-foot overall length
- Sliding tandem axles
- Stake pockets on 24" centers
- 5/16" x 2" rub rail with double pipe spools
- 6-inch structural side rails
- Plug and play rubber mounted LED lights
- 4 stake pockets across front channel for headboard



PROVEN EXTENDABLE TECHNOLOGY

The XL FDE uses XL's patented Extend-a-trac to extend and retract the deck without hooking and unhooking air and electrical lines. The air operated lock pins have extension stops every 60 inches. Four 6-inch greasable rollers make extending and retracting the trailer smooth.


VERSATILE AXLE OPTIONS

Haul a variety of loads with the XL 80 FDE; sliding tandem axles adjust using a simple lock pin to work best with each load's specific weight distribution. The FDE is available with four axle-spread options: 49-inch (with spring suspension only), 54-inch, 60-inch or 10-foot 1-inch. The 48-foot long rear deck features a 58-inch loaded deck height.



Zips.com | 800-222-6047

XL FLAT DECK EXTENABLE SPECS

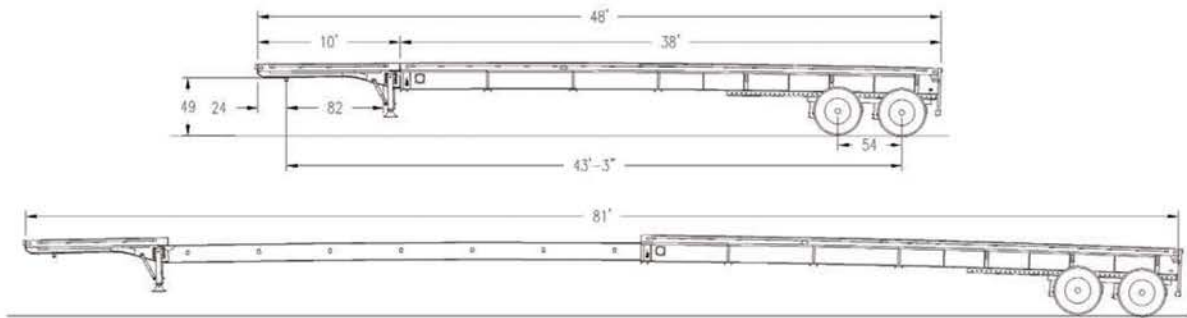

CAPACITY

capacity: 80,000 lb overall
concentrated: 60,000 lb in 10'

OVERALL LENGTH & WIDTH

overall length: 48'-81'
overall width: 102"

FRONT DECK

10' long
49" 5th wheel height
2 speed landing gear with handle curbside
24" king pin setting
82" swing clearance
4 stake pockets across front
channel for headboard
5/16" x 2" rub rail with double
pipe spools
steel winch track on driverside
12 steel winches
1 1/8" Apitong decking - flush
1 pair flag holders
registration holder

REAR DECK

38' long
T-1 flange, 80K web
extend-a-trac
air operated lock pins with extension
stops on 60" centers
(4) 6" greasable rollers
58" loaded deck height
sliding tandem
stake pockets on 24" centers
5/16" x 2" rub rail with double
pipe spools
6" structural side rails
4" jr. i-beam cross members
on 12" centers
1 1/8" Apitong decking - flush
stake pockets in tail channel for
wide load sign

dock bumpers
1 pair flag holders

REAR DECK OPTIONS

spare tire carrier
1 3/8" Apitong decking - raised
additional 2" side clearance lights
4" amber strobe tail light
(1) 4-way plug
48" head board (non-wrap around)
side load sign

SUSPENSION

25,000 lb air ride

SUSPENSION OPTIONS

liquid filled air gauge
spring suspension
manual ride height control
Air-weigh digital scale

AXLES

(2) 25,000 lb nominal
hub pilot, outboard drums
452M spring brakes on 2 axle
limit straps
16 1/2" x 7" brakes
77 1/2" tracking

AXLE OPTIONS

54" axle spacing
60" axle spacing
10' 1" axle spacing
49" axle spacing (spring suspension only)
PSI tire inflation system
hubometer
cam covers and dust shields

WHEELS & TIRES

8.25 x 22.5 steel rims
11R / 22.5 tires

WHEEL & TIRE OPTIONS

aluminum mill wheels (inside)
aluminum mill wheels (outside)
aluminum polished wheels (outside)
aluminum Durabright wheels
(outside)

LIGHTING

12V sealed Grote harness
rubber mounted LED lights
2 tail light package with
aluminum cover
3 clearance lights per side
1 mid-turn light per side
7 pole electric socket

PAINT

black, IH red, CAT yellow
air & electric done after paint

PAINT OPTIONS

non-standard paint colors
non-standard metallic paint

WARRANTY

5 year structural
1 year paint

AVAILABLE MODELS

XL 80 FDE
other custom capacities also available,
ask your sales representative for details
standard features vary with custom units