



XL LOW-PROFILE HDG: 15" DECK HEIGHT



FEATURES

- 13-foot gooseneck with 110 inches of swing clearance
- Gooseneck relief cut-outs allow truck fenders to clear
- 15-inch loaded deck height
- Frame reinforcement for a fourth axle
- 275 tires and recessed bolsters
- Heavy-duty 31-inch front flip ramps
- Third axle air lift



LOWEST STANDARD DECK HEIGHT


With a loaded deck height of only fifteen inches, this flat deck lowboy can accommodate loads that may otherwise require a dropside trailer. XL's Low-Profile HDG features a capacity of 110,000 pounds in 12 feet and the ability to add a flip axle if needed, therefore handling a wide range of loads.

MAXIMUM VERSATILITY

Enjoy XL's construction-focused and customer-friendly features. In the rear, a deep bucket well provides an area for an excavator bucket to ride safely without detaching the lower boom section. The main deck offers many tie-down points with 7 bent d-rings per side, 12 chain drops per side on the center deck, 13 chain drops per side on the outer rails as well as swing out outriggers on 24-inch centers.



Zips.com | 800-222-6047

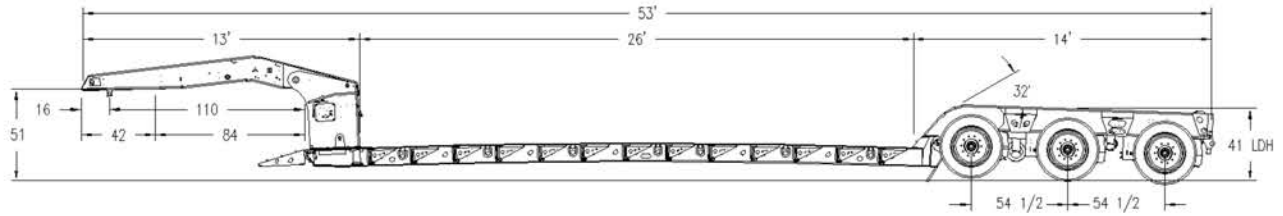

XL 110 LOW-PROFILE HDG: 15" DECK HEIGHT SPECS

CAPACITY

capacity: 110,000 lb overall
concentrated: 110,000 lb in 12'

OVERALL LENGTH & WIDTH

overall length: 53'
overall width: 102"

GOOSENECK

13' low-profile style neck
with relief cut-out
51" 5th wheel height
5 position variable ride height
110" & 84" swing clearance
16" & 42" king pin setting
hydraulics run off wet kit
access panel in base of neck
air operated lock with manual
safety latch
brackets for power unit
work light

GOOSENECK OPTIONS

toolbox in rear of neck with
steel door
13HP power unit, base of neck,
steel cover, dual hydraulics
13HP power unit, top of neck,
dual hydraulics
steel fenders on side of
gooseneck
aluminum fenders on side of
gooseneck
registration holder

MAIN DECK

26' long
T-1 flange, 80K web
3 beam design
15" loaded deck height
4 1/2" ground clearance
formed crossmembers &
4" crossmembers on 12" centers
31" front flip ramps
1 3/8" Apitong decking - raised, outer bays
center deck covered, steel & Durabak
toolbox in front of deck
7 bent d-rings per side
13 chain drops per side, outer rails
12 chain drops per side, center beam
swing out outriggers on 24" centers

heavy-duty front flatback outriggers
bucket well at rear, plate on bottom
front ramp upper flange reinforcement
2 flag holders

MAIN DECK OPTIONS

upper flange reinforcement
center deck covered
2 additional pair of clearance lights
Oak outrigger planks, 2" x 10"

REAR BRIDGE

rear transition with 32° slope
41" loaded deck height
37" bolster height
open wheels - bolster style
open boom trough
2 flat d-rings on main beams at rear
2 chain drops on each bolster
2 flag holders
2 stake pockets in tail channel
for wide load sign
frame reinforcement for flip axle
tail channel notched out

REAR BRIDGE OPTIONS

removable wheel covers heavy-duty,
load bearing
covered boom trough,
bolt-on bottom plate
4" amber strobe tail light
battery back-up with 4-way plug for FA
wide load sign
(1) 4-way plug at rear

SUSPENSION

25,000 lb air ride
raise and lower valve
manual ride height control
liquid filled air gauge

SUSPENSION OPTIONS

Air-weigh digital scale

AXLES

(3) 25,000 lb nominal
air lift on 3rd axle
hub pilot, outboard drums
16 1/2" X 7" brakes
auto slack adjusters
54 1/2" axle spacing

limit chains on all axles
spring brakes on 1 axle
ABS not required

AXLE OPTIONS

hubometer
dust shields
cat eye systems

WHEELS & TIRES

8.25 x 22.5 steel rims
275 / 70R / 22.5 tires

WHEEL & TIRE OPTIONS

aluminum mill wheels (inside)
aluminum mill wheels (outside)
aluminum polished wheels (outside)
aluminum Durabright wheels
(outside)

LIGHTING

12V sealed Grote harness
rubber mounted LED lights
2 tail light package with
aluminum cover
2 clearance lights per side
1 mid-turn light per side
7 pole electric socket

PAINT

black, IH red, CAT yellow
air & electric done after paint

PAINT OPTIONS

non-standard paint colors
non-standard metallic paint

WARRANTY

5 year structural
1 year paint

AVAILABLE MODELS

XL 110 Low-Profile HDG
XL 110 Low-Profile HDG: 15" deck height
XL 110 Low-Profile HDG: 18" deck height
XL 120 Low-Profile HDG
other custom capacities also available,
ask your sales representative for details
standard features vary with custom units