



XL MFG: ALUMINUM PULLOUTS



FEATURES

- Lockable toolbox features chain rack and light
- Ideal design for hauling wide wheeled equipment
- Pullout front ramp, steel and aluminum
- Traction aids on the rear bridge transition
- Angled control panel for easy access
- Front ramp tapers to 4 inches
- Rear is reinforced for flip axle



FULLY EQUIPPED MAIN DECK


The XL 80 MFG deck is fully equipped for versatile hauling with fourteen half-inch chain drops per side, six bent d-rings per side, and aluminum pullout outriggers. The rugged Apitong decking stands up to years of wear and tear.

ALUMINUM OUTRIGGERS

XL's pullout outriggers boast helpful features; 45 degree angled corners prevent tire damage while cleanout holes allow dirt and debris to escape, preventing rust. They extend 27", taking the deck from 8.5 feet wide to 13 feet wide. Each extrusion, set on 18 inch centers, has a capacity of 4,400 pound.



Zips.com | 800-222-6047

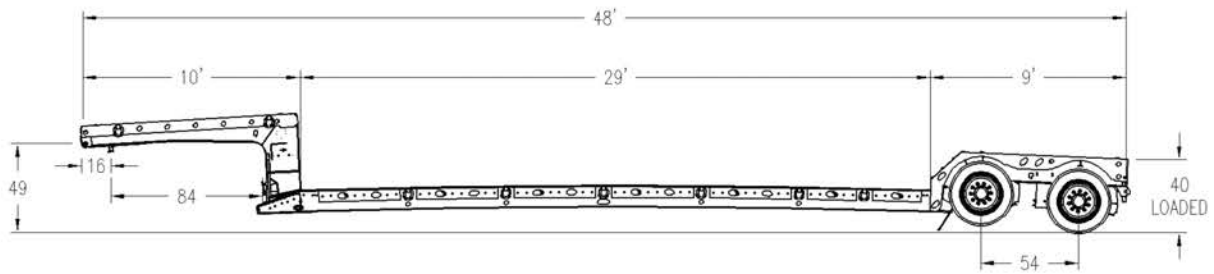

XL 80 MFG: PULLOUTS SPECS

CAPACITY

capacity: 80,000 lb overall
concentrated: 70,000 lb in 16'

OVERALL LENGTH & WIDTH

overall length: 48'
overall width: 102"

GOOSENECK

mechanical detachable full-width
10' long
49" 5th wheel height
84" swing clearance
16" king pin setting with 3/8" plate
2 bent d-rings per side
2 pan style d-rings per side,
on corners
1 1/8" Apitong decking - flush
aluminum mudflaps
double donut front connector plate
toolbox in base w/ lockable
aluminum lid, chain rack, light

GOOSENECK OPTIONS

pull out lights
1 pair clearance lights
1 3/8" Apitong decking - raised
registration holder

MAIN DECK

29' long
T-1, 80k web
(4) 12" fab i-beams
18" loaded deck height
6" ground clearance
6" jr. i-beam cross members
on 18" centers
6 bent d-rings per side
4 pan style d-rings per side
1 1/8" apitong decking flush,
center covered
ramp tapers to 4"
(18) 1/2" chain drops per side
aluminum pullout outriggers
on 18" centers
aluminum pullout front ramps

MAIN DECK OPTIONS

center deck open
storage compartments in front
of main deck
1 3/8" Apitong decking - raised
clearance lights
4-way plug(s)

REAR BRIDGE

9' long
40" deck height
1 1/8" Apitong decking flush
2 flag holders
2 stake pockets in tail channel
2 pan style d-rings per side,
on corners
frame reinforcement for flip axle
66" wide bumper at rear

REAR BRIDGE OPTIONS

1 pair clearance lights
pull out lights
4" amber strobe tail light
additional tail light
battery back up
(1) 4-way plug
1 3/8" Apitong decking - raised
dock bumpers

SUSPENSION

25,000 lb air ride
raise and lower valve
manual ride height control

SUSPENSION OPTIONS

liquid filled air gauge
air weigh digital scale
control in aluminum box - ball valves
electric dump valve with 4-way plug
and wire

AXLES

(2) 25,000 lb nominal
54" spacing
hub pilot, outboard drums
4S2M ABS

16 1/2" x 7" brakes
(2) pair spring brakes

AXLE OPTIONS

hubometer
TP axles (same inner & outer bearings)

WHEELS & TIRES

8.25 x 22.5 steel rims
255 / 70R / 22.5 tires

WHEEL & TIRE OPTIONS

aluminum mill wheels (inside)
aluminum mill wheels (outside)
aluminum polished wheels (outside)
aluminum Durabright wheels (outside)
Michelin 255/70R/22.5 tires
Goodyear 275/70R/22.5 tire
(41" rear bridge)

LIGHTING

12V sealed Grote harness
rubber mounted LED lights
2 tail light package with
aluminum cover
2 clearance lights per side
1 mid-turn light per side
7 pole electric socket

PAINT

black, IH red, CAT yellow
air & electric done after paint

PAINT OPTIONS

non-standard paint colors
non-standard metallic paint

WARRANTY

5 year structural
1 year paint

AVAILABLE MODELS

XL 80 MFG
other custom capacities also available,
ask your sales rep for details
standard features vary with custom MFGs