



XL STEP DECK: T-SERIES



FEATURES

- 1 1/8-inch flush Apitong decking is stronger than Oak
- 3-inch channel crossmembers on 16-inch centers
- available with 48-foot or 53-foot overall length
- built to last, using T-1 flange and 80K webs
- 3/8" x 2" rub rail with single pipe spools
- stake pockets on 24" centers
- knee braces on 48" centers
- mill channel side rails



VERSATILE AXLE OPTIONS

The XL SD: T-Series is available with four axle-spread options: 49-inch (with spring suspension only), 54-inch, 60-inch or 10-foot 1-inch. Choose from the standard 40 inches loaded deck height, or go to 17.5 tires for a loaded deck height of 36 inches.


BEAVER TAIL

The XL SD: T-Series features a 6-foot long beaver tail with 5-foot 8-inch spring assist ramps. Use the beaver tail and ramps to load equipment faster. Add wood to your ramps for added strength and traction. A third center deck option is also available to add to your beaver tail.



Zips.com | 800-222-6047

XL 60 SD T-SERIES SPECS

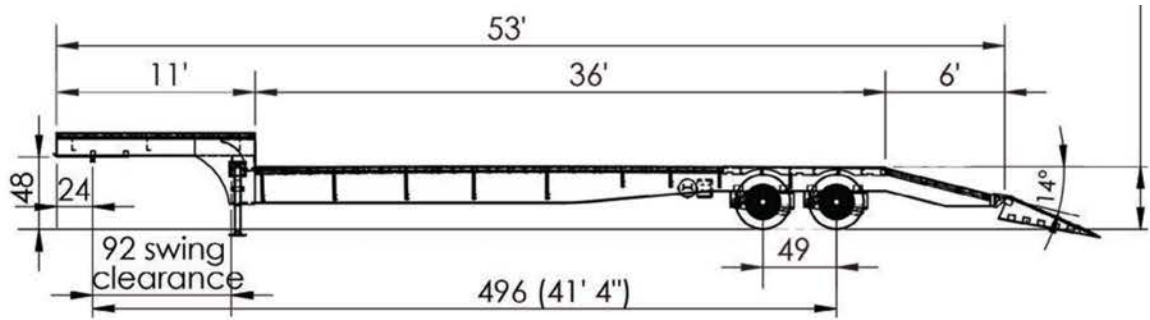

CAPACITY

capacity: 60,000 lb overall

OVERALL LENGTH & WIDTH

overall length: 53'
overall width: 102"

GOOSENECK

11' long
24" king pin setting & 86" swing
48" fifth wheel height
1 1/8" apitong decking
2 speed landing gear
stake pockets on 24" centers
3/8" x 2" rub rail with
single pipe spools

MAIN DECK

36' long
T-1 flange, 80K web
40" loaded deck height
1 1/8" Apitong decking flush
3" channel crossmembers
on 16" centers
mill channel side beams
stake pockets on 24" centers
3/8" x 2" rub rail with
single pipe spools
knee braces on 48" centers
2 tool boxes (12" x 12" x 48")
6' beaver tail
5' 8" spring assist ramps

MAIN DECK OPTIONS

no beavertail
aluminum toolbox 18" x 18" x 48"

traction over wheels
additional 2" side clearance lights
amber strobe tail lights
sliding winch track, driverside
sliding winch track, curbside
sliding winches, driverside
manual dump valve
wood on ramps
(only available with beaver tail)
3rd load ramp
(only available with beaver tail)
4" i-beams in lieu of 3" channel
c-channel on ramps
formed step on front

SUSPENSION

25,000 lb air ride

AXLES

(2) 25,000 lb dexter
77 1/2" tracking
2S1M spring brakes on 1 axle
161/2" x 7" brakes
hub pilot, outboard drums

AXLE OPTIONS

49" axle spacing
54" axle spacing
60" axle spacing
10' 1" axle spacing
PSI tire inflation system

WHEELS & TIRES

8.25 x 22.5 steel rims
255 / 70R / 22.5 tires

WHEEL & TIRE OPTIONS

weld-on mount for spare tire
bolt-on mount for spare tire
aluminum wheels (inside)
aluminum wheels (outside)
235/70R/17.5 tires (36" deck height)
spare 255 tire and steel wheel
spare 235 tire and steel wheel

LIGHTING

sealed wiring harness
rubber mounted LED lights
2 tail light package

PAINT

black, IH red, CAT yellow
air & electric done after paint

PAINT OPTIONS

non-standard paint colors
non-standard metallic paint

WARRANTY

1 year structural
1 year paint

AVAILABLE MODELS

XL 60 SD
XL 80 SD