


6 Function Standard Transmitter

REPLACEMENT TRANSMITTER

92106TX 6 Function Standard Transmitter

CONTENTS

1 x Standard Transmitter
 1 x Lanyard
 1 x Cover
 1 x Instructions

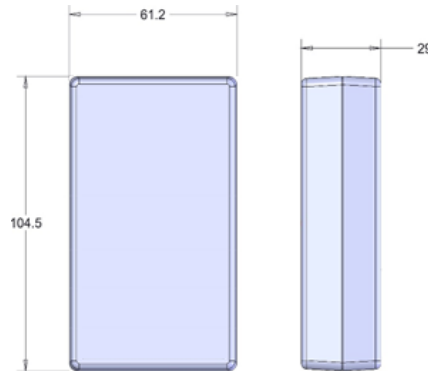

TRANSMITTER SPECIFICATION

ENCLOSURE

Material Glass reinforced Nylon
 Switch Type 12mm Dome Switch
 Functions 6
 Identification Pockets for printed text or image insertion

RF

Modulation 2-GFSK. Gaussian Frequency Shift Keying
 Frequency 433.050 MHz to 434.790 MHz
 Channels 1
 Channel Selection Fixed
 Technology Hand-held Transmitter
 Temperature Range -10° C to + 40° C (13° F to + 104° F). Use Lithium for lower temperatures
 Range 60m (200ft)
 Aerial Internal – printed on PCB
 Transmitted power 1mW Typical

POWER

Batteries 1x 9V Alkaline Manganese
 Quiescent Current 15µA
 Current Transmitting 20mA

PROTECTION

IP Rating 54
 Registration codes Over 16 million

INDICATOR

Type 1 x Red LED
 Off Transmitter is OFF and in standby mode
 Slow flash Transmitter is ON and ready for use (The SET Button has been pressed and released)
 On Transmitting (A STOP, SET or Function Button is being pressed)
 Fast flash Transmitting – Indication that the battery will need replacing soon

COMPLIANCE

FCC FCC CFR 47-part 15.231
 433.9MHz

IC ISED RSS-210 Issue 8
 433.9MHz

RoHS Directive 2011/65/EU