


# CENTURY<sup>®</sup>

## *10 Series Carriers*

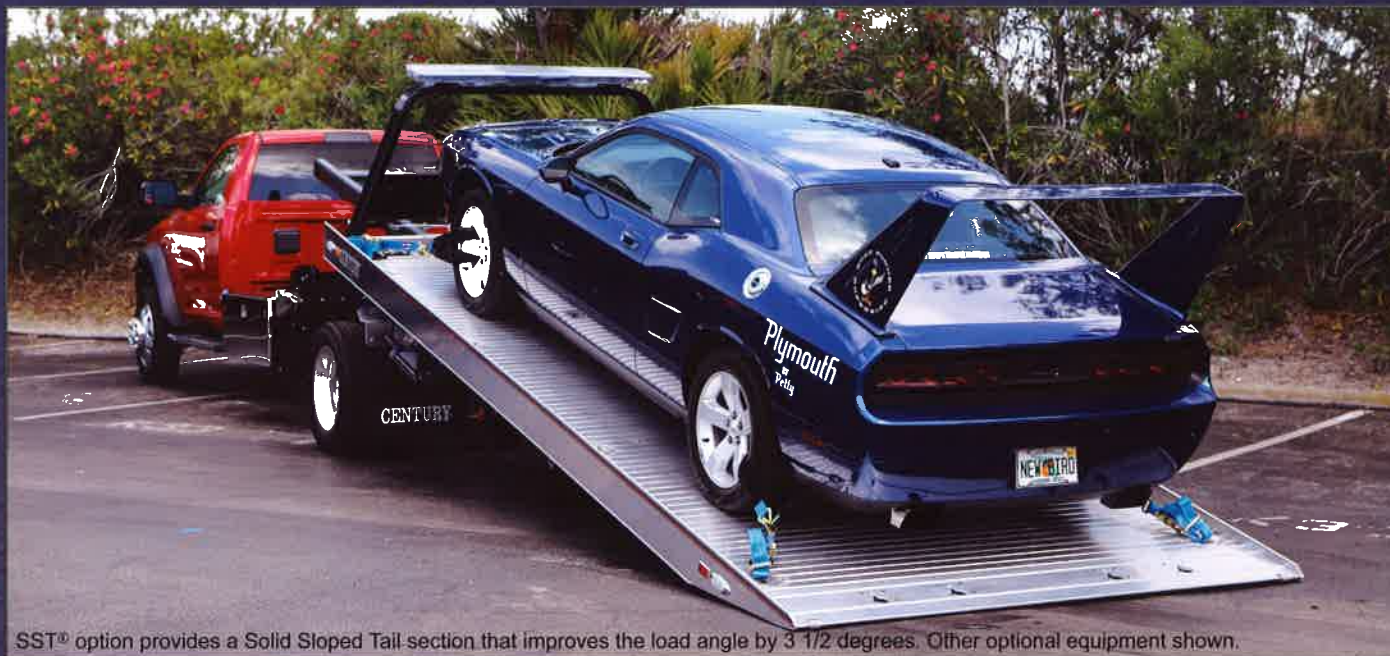

SST<sup>®</sup> option provides a Solid Sloped Tail section that improves the load angle by 3 1/2 degrees. Other optional equipment shown.

At Century, we feel that "Keeping up with the Industry" is nothing but an excuse. If we can't produce a product that is superior to everything in its class... then you won't see our name on it. Our Car Carriers are a perfect case-in-point. They possess every standard feature that you would expect from a World Leader, brought together in a sleek, attractive and durable package. With an independent wheel lift system, positive lock down, extra-low loading angle, and easy one-man operation, Century Carriers have driven past every limitation that has held "The Industry" in check. Century leaves no room for argument.



**"The Number One Selling Brand of Towing  
& Recovery Equipment Worldwide."**



## STANDARD FEATURES

- Platform Available in Aluminum or Steel
- Floor Level Sides w/ Stake Pockets (Steel)
- Tri-Hollow Tube Rails (Alum.)
- Subframe Length 210" OBT, 230" IBT
- Right & Left Chain Trays
- Safety Chains (2 front, 2 rear)
- Painted in Black Acrylic Urethane (Steel Only)
- Left & Right Side Illuminated Controls
- Federal Standard #108 LED Lighting
- 8,000-lb. Hydraulic Winch w/50' Cable
- Full Function Wheel Lift System
- Slide-In L-Arms w/ Anti-Theft Storage
- Pre-Wired Electrical Junction Box
- Back-Up Lights & Alarm
- Adjustable Rear Stabilizer
- 6-Spool Capable Control Station
- Bed Built 96" Wide
- 11 Key Slots (Steel)
- 6 Key Slots (Alum.)
- Slide Pads
- Bed Anti-tilt Lockout
- Positive Lock-down
- Two Lift Cylinders
- One Extension Cylinder
- Manual Shift Winch Clutch Release
- Cable Tensioner
- Cable Roller Guide
- Tow Light Socket
- Mud Flaps
- Hydraulic Pump

## OPTIONAL FEATURES

- Frame-Mounted Headboard (Req. 6" Additional CA)
- Bed-Mounted Headboard
- Smooth Floor in lieu of Tread Plate (Steel)
- Optional Color on top of Deck & Side Rails (Steel)
- Solid Tube Side Rails (Steel)
- Solid Narrow Profile Rails (Alum.)
- Steel Removable Tube Rails\*
- Aluminum Removable Blade Rails
- Work Lights (Rear, Pylon or Winch Mounted)
- 3-Way Pivoting L-Arm System
- Dock Stabilizer / Wheel Lift Combination
- Wired or Wireless Winch Remote
- Steel or Aluminum Tool Compartments
- Various Chain & Strap Assemblies
- Optional Planetary Winch
- SST<sup>®</sup> - Solid Sloped Tail Section
- Right Approach<sup>®</sup> Option (Steel)
- 9-Spool Control Station
- Air Shift Winch Clutch Release
- Bed Built 102" Wide
- Galvanized Subframe
- SP 8000 Sidepuller
- Wood Floor\*
- Rubber Flooring\*
- PTO
- Switch Panel
- Additional Lighting
- Auto-Grip Wheel Lift
- 6 Key Slot Package (Alum.)
- Additional Key Slots
- Side Mount Winch (Steel)
- Outboard Lift Cylinders (Required for chassis with mid-ship fuel tanks)

\*N/A on the Right Approach<sup>®</sup> and SST<sup>®</sup>

## CABTOAXLE(C.A.) REQUIREMENTS

Carrier Length (Ft)	Tilt Method	CA (In)
SP 8000 Sidepuller		Add 12"
Frame-Mounted Headboard		Add 6"
19'	OBT	120"
19.5'	OBT	120-126"
21'	IBT	138"
21.5'	IBT	144"
22'	IBT	150"

NOTE: All ratings are based on structural factors only, not vehicle capacities or capabilities. Specifications shown are approximations and may vary depending on chassis selected. Platform rating is based on an equally distributed load. Actual payload carrying capacity is determined by the curb weight of the chassis and equipment and should not exceed the GVWR of the chassis. Miller Industries Towing Equipment Inc. reserves the right to change or modify product and or specifications without notice or obligation. Some equipment shown is optional.

## BED SPECIFICATIONS

Load Rating*	10,000 lbs.
Platform Length	19', 19.5', 21', 21.5', 22'
Platform Thickness	3/16"
Platform Width (Outside)	96"
Platform Width (Inside)**	91.5"
Steel Crossmembers	2" x 2" on 8" Centers
Alum. Crossmembers	2.25" on 4" Centers

\* Platform rating is based on equally distributed load

\*\* Inside bed widths will vary based on siderail option

Winch (1st Layer)	8,000 lb.
Wire Rope	3/8" x 50'
Wheel Lift Rating*	3,000 lbs.
Tow Rating at Full Extension**	7,500 lbs.

## CHASSIS RECOMMENDATIONS

Min. GVWR*	15,000lbs.
Max. GVWR*	25,500
Recommended Tire Size	16" - 19.5"
Min. Frame Height	34"
Max. Frame Height	39"
Min. Frame Length Behind Center of Rear Axle	36"

NOTE: The outside frame rails of the chassis extending behind the cab must be free of fuel tanks, air tanks, battery boxes, exhaust stacks, etc.



## SP 8000 RATINGS & FEATURES

Boom	8,000 lbs.
Winch	8,000 lbs.
Stiff Leg	8,000 lbs.
• Eight Tie-Back Points	• Hydraulic Stiff Legs
• Multi-Positional Flipper Feet	• Center Pivoting Boom Head
• 8,000-lb. Planetary Winch	• Removable Outer Boom Head
• Winch Tensioner & Free-Spool	• Painted in Flat Black
• Wire Rope - 3/8" x 100'	

## SP 8000 OPTIONAL FEATURES

- Wired or Wireless Winch Control
- Lightbar Mount

**Miller**  
INDUSTRIES

©2015 Miller Industries Towing Equipment Inc. All Rights Reserved.

**ZIP'S**  
TRUCK EQUIPMENT

316 W. Milwaukee  
P.O. Box 511  
New Hampton, IA 50659  
[www.zips.com](http://www.zips.com)  
800-222-6047