



FRONT VIEW

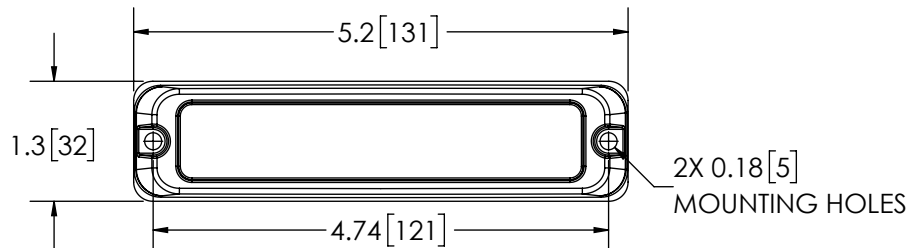

FRONT VIEW W/ BEZEL

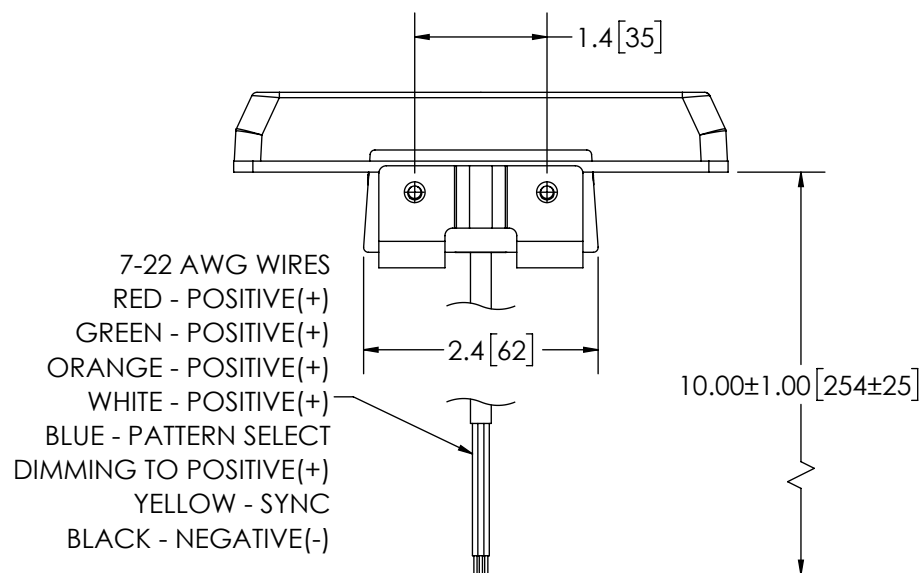

BOTTOM VIEW W/ BRACKET

- NOTES:
1. ROHS COMPLIANT
 2. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

REVISION HISTORY		
REV.	DESCRIPTION	DATE
B	REVISED PER EP0152	2022-08-02
C	REVISED PER EP0152	2022-10-18
D	REVISED PER EP0152	2023-05-04



SPECIFICATIONS

1. CERTIFICATIONS: ECE R10; SAE J595 (AUG 2021) CLASS 1; RED, BLUE, YELLOW, WHITE; CA Title 13 CLASS B; RED, BLUE, YELLOW; Reg 65 CertE6 XA1 000461, E6 XB1 000462, E6 XR1 000437; IP67/IP69K
- Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
3. FLASH MODE: SINGLE : 75 ± 5 FLASHES PER MINUTE
SINGLE : 120 ± 5 FLASHES PER MINUTE
SINGLE : 75 ± 5 FLASHES PER MINUTE
4. VOLTAGE (NOMINAL): 12-24 VDC
5. VOLTAGE (EXTREME): 9-32 VDC
6. CURRENT (PEAK): 0.9A (@ 12 VDC NOMINAL)
7. POWER (MAXIMUM): 11.0W (@ 12 VDC NOMINAL)
8. TEMPERATURE RANGE: -40°F (-40°C) TO 149°F (65°C)
9. CONNECTION: 7 - 22 AWG WIRES
10. MOUNTING: 2-BOLT
11. BASE MATERIAL: ALUMINUM
12. LENS MATERIAL: POLYCARBONATE
13. PRODUCT WEIGHT: 0.2 LBS (0.09 Kg)

COLOR CHART	
FGS. NO.	COLOR
ED3716RBAW	RED/BLU/AMB/WHT

PROPRIETARY AND CONFIDENTIAL INFORMATION

THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN ARE THE PROPERTY OF ELECTRONIC CONTROLS COMPANY AND/OR ITS ECCO SAFETY GROUP AFFILIATES ("ECCO") AND IS ISSUED IN CONFIDENCE TO RECIPIENT FOR ENGINEERING INFORMATION PURPOSES ONLY. THIS DRAWING AND THE DESIGN AND OTHER INFORMATION DISCLOSED HEREIN MAY NOT BE USED, COPIED, REPRODUCED OR OTHERWISE DISCLOSED IN PART OR IN WHOLE TO THIRD PARTIES OR USED FOR ANY OTHER PURPOSE WITHOUT PRIOR ECCO WRITTEN CONSENT. ECCO RESERVES ALL PATENT, COPYRIGHT, TRADEMARK AND OTHER PROPRIETARY RIGHTS TO THIS DOCUMENT, INCLUDING ALL DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALES RIGHTS THERETO. THIS DRAWING IS SUBJECT TO RECALL BY ECCO AT ANY TIME, AND YOUR POSSESSION AND/OR USE CONSTITUTES ACCEPTANCE OF THESE TERMS. ©2022 ELECTRONIC CONTROLS COMPANY

SCALE 1:2			APPROVALS	DATE	 ECCO [®] www.eccolink.com Americas (800) 635-5900 Europe +44 (0)113 237 5340 Asia Pacific +61 (0)3 63322444				
CAD GENERATED DRAWING DO NOT MANUALLY UPDATE.			DRAWN BY ABD	2023-05-02					
			CHECKED BTK	2023-05-04					
TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES UNLESS OTHERWISE STATED ARE:			MECH. ENG.						
<u>MILLIMETERS DECIMALS</u> XX. ± 1.0mm XX.X ± 0.5mm	<u>INCHES DECIMALS</u> X.X ± 0.1 X.XX ± 0.04 X.XXX ± 0.02	<u>ANGLES</u> ± 0.5° <u>FRACTIONS</u> ± 1/64	ELEC. ENG.		24 LED HEAD, MULTIMOUNT, 12-24V				
 THIRD ANGLE PROJECTION			TEST ENG.			CUSTOMER PART NO. SEE CHART			
			SALES.				SIZE: A	DWG. NO. ED3716XXXX	REV. D
			Electronically Controlled Use Latest Copy	SHEET 1 OF 1			Project: EP0152	Date Created: 2022-04-19	