

Sign Dial Installation Guide

Pre-Installation Checklist




- 1 Carefully remove the Dial from its packaging.
- 2 Inspect the Dial for any visible damage before proceeding to the next step.


Damage to the Dial is very rare and typically only occurs if the shipping box shows visible signs of damage. Our packaging is specially designed to protect the device and prevent damage during transit. **If damage is present, please stop install immediately and call your distributor.**

Installation Instructions

- 1 Choose a location for the Dial: Ensure the selected spot provides sufficient clearance behind the Dial to allow proper routing of the cable and terminator.

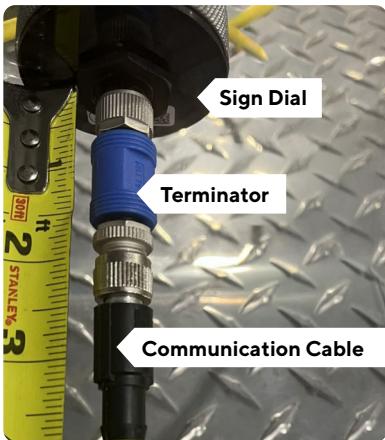

② **Prepare the dashboard for installation:** Drill a hole large enough to accommodate the Dial, ensuring a clean and precise fit for proper installation.

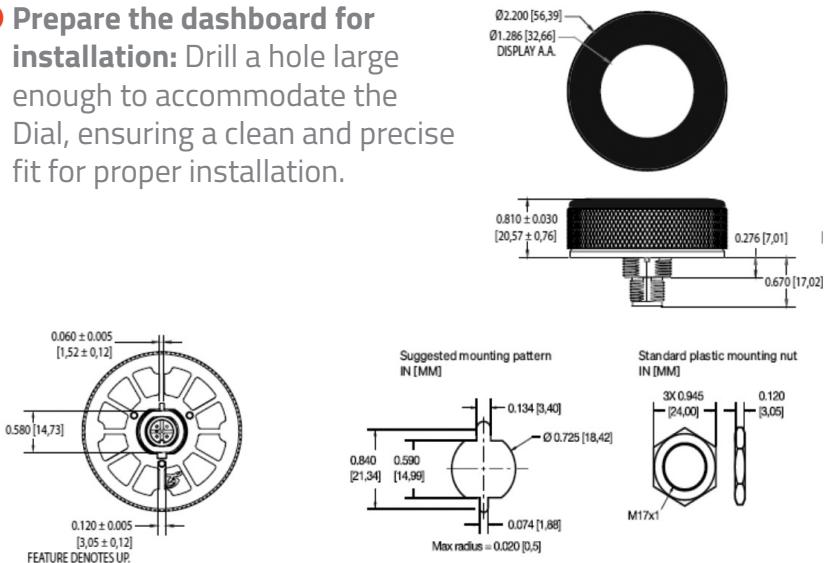

- ③ Route the CAN cable from the Traffic Commander to the selected location.
- ④ Install the terminator.
- ⑤ Attach the Dial to the terminator.



Important Caution!

Do not use tools to tighten the Dial to the terminator. This connection should **only be secured finger tight.** Over-tightening will cause damage.