
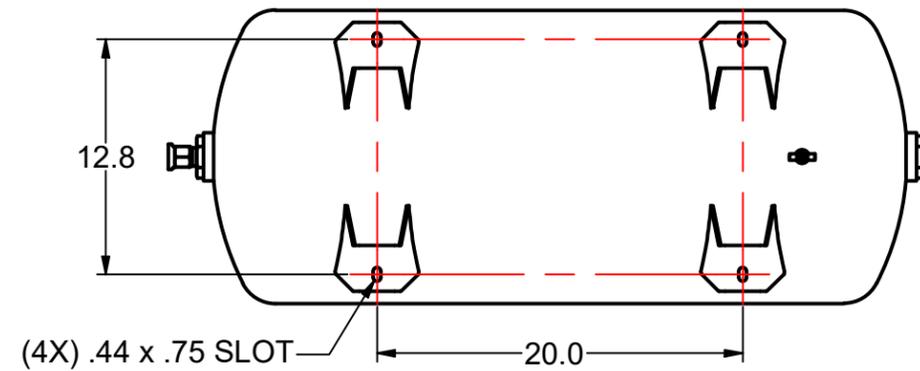
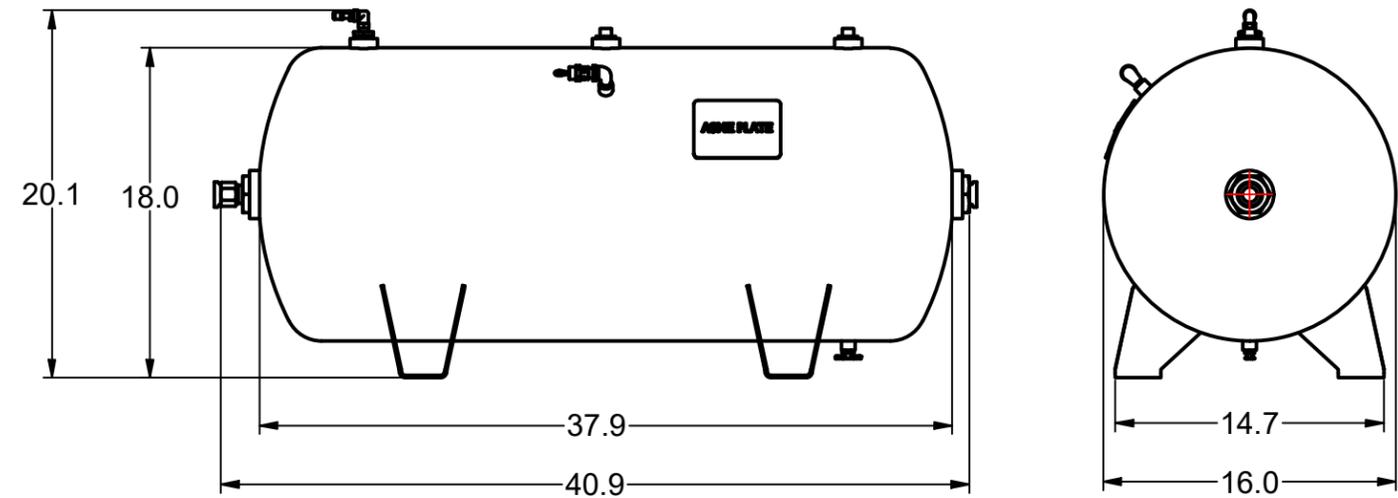


**NOTES:**

1. APPLY LOCTITE® 567 THREAD SEALANT OR EQUIVALENT TO ALL MALE NPT FITTINGS.
2. RECOMMENDED HOSE FROM COMPRESSOR TO AIR TANK:
  - a. IF USING RECIPROCATING COMPRESSOR USE HI-TEMP TEFLON STAINLESS STEEL BRAIDED HOSE.
  - b. IF USING SCREW COMPRESSOR USE MEDIUM-PRESSURE HOSE, REF VANAIR #261092.
3. AIR IN - CONNECT TO AIR SUPPLY.
4. AIR OUT - REMOVE PLUG & CONNECT TO AIR HOSE, HOSE REEL, OR QUICK DISCONNECTS.

**PARTS LIST**

ITEM	PART NUMBER	DESCRIPTION	QTY
1	264232	VALVE, RELIEF 200 PSI 1/4 NPT MALE	1
2	267187	ELBOW, 5/16T X 1/4P PUSH ON	1
3	801115-010	ELBOW, PIPE STREET 1/4	1
4	804103-010	BUSHING, PIPE GALV 3/4 x 1/4	1
5	807800-030	PLUG, PIPE 3/4	2
6	A18096P	TANK, 30 GAL	1
7	CO86598	VALVE, CHECK 3/4 NPT M-F	1
8	FI74953	VALVE, PETCOCK VALVE, 1/4 NPT	1
9	PR75672	PLUG, PUSH-IN, VINYL, 5/16DIA,	1
10	PR77413	PLUG, PUSH-IN, VINYL, 1 1/16	2

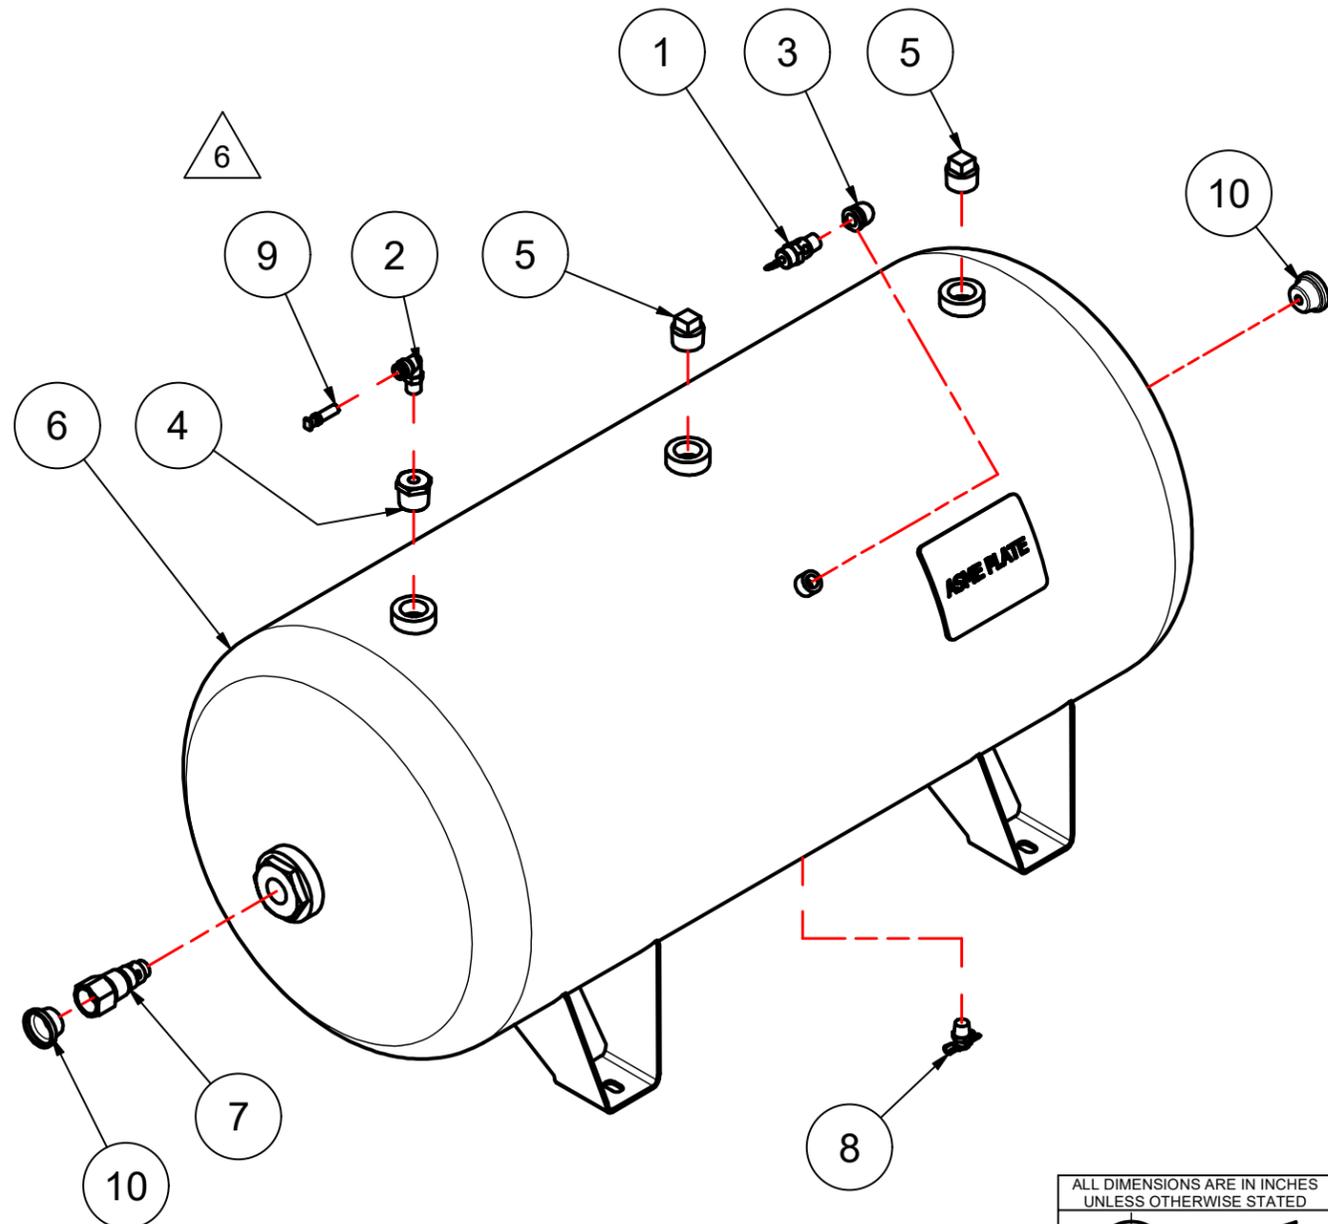

REV	ZONE	DATE	DESCRIPTION	BY	ECN
6		12/17/2025	REPLACED 261310 W/ 267187; ADDED PR75672	CAW	22321
5		1/3/2013	REPLACED FI79286 WITH 261310.	GLG	16928

**REVISION HISTORY**

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE STATED	TOLERANCE UNLESS OTHERWISE STATED DECIMAL 1 PL. ± .1 DECIMAL 2 PL. ± .03 DECIMAL 3 PL. ± .005 ANGULAR ± 1°
--	--



THIS PRINT & THE SPECIFICATIONS HEREIN ARE THE PROPERTY OF VANAIR MFG. INC. AND MAY NOT BE GIVEN TO ANY OTHER CONCERN WITHOUT THE PRIOR WRITTEN CONSENT OF VANAIR MFG. INC.

FINISH/COLOR	MATERIAL	PART DESCRIPTION	
/		AIR OPTION- REMOTE AIR TANK	
AUTHOR J. MORTON	DATE 1/3/2013	ADDITIONAL INFO	PART NUMBER
SCALE 1/10	WEIGHT 80.4#	ANA	OA49645ID
SIZE B	SHEET 1 OF 1		