

THE MOST TRUSTED OUTRIGGER PADS IN THE WORLD

SafetyTech® Outrigger Pads are engineered from top to bottom and built using our proprietary engineered thermoplastic formula for improved performance that meets your everyday needs.

Owners and operators love DICA SafetyTech Pads for their toughness, ease of use and durability. These qualities help teams work safely, efficiently and cost-effectively in some of the toughest environments around the world.

- ▶ **Engineered Thermoplastic Material**
- ▶ **Guaranteed Unbreakable**
- ▶ **Ergonomic TuffGrip Handles**
- ▶ **Patented Designs**
- ▶ **Available in 3D Plan**

ENGINEERED MATERIAL

DICA's engineered thermoplastic material eliminates issues found with wood and steel pads and ensures a strong and stable foundation.

ERGONOMIC HANDLES

TuffGrip Handles are guaranteed unbreakable, comfortable, waterproof, and resistant to use and abuse on the job site.

PATENTED TECHNOLOGY

DICA Pads have been awarded six patents, which cover our innovative handle and pad designs that make our pads safer and easier to use.





“Your pads have outperformed our previous plastic pads in every way. Even your handles are comfy!”

Dan Sundermeier
AMERICAN ARBORIST

PRODUCT DETAILS

- Engineered Thermoplastic Material
- TuffGrip® Handles
- Waterproof and Chemical Resistant
- Industrial Grade Safety Texturing
- Radius Edges and Corners
- Non-Conductive
- 1 Person Carry
- Guaranteed Unbreakable

BEST FOR

- Equipment with Stabilizers
- Bucket Trucks
- Digger Derricks
- Landing Gear Equipment

PRODUCT	W x L x H (in)	THICKNESS (in)	APPROX AREA (sq ft)	WEIGHT (lbs)	CRUSH RATING* (psi)	WORKING LOAD LIMIT* (lbs)
1" Pads						
A D1818	18 x 18 x 1	1 inch	2	11	200	45,000
B D1818-Y	18 x 18 x 1	1 inch	2	11	200	45,000
C D1818-O	18 x 18 x 1	1 inch	2	11	200	45,000
D D2224	22 x 24 x 1	1 inch	3.5	17	200	55,000
E D2424	24 x 24 x 1	1 inch	4	19	200	60,000
F D2424-Y	24 x 24 x 1	1 inch	4	19	200	60,000
G D2424-O	24 x 24 x 1	1 inch	4	19	200	60,000
H D3030	30 x 30 x 1	1 inch	6	30	200	75,000
I D3636	36 x 36 x 1	1 inch	9	43	200	80,000
1.5" Pads						
J D1818-1.5	18 x 18 x 1.5	1.5 inch	2	15	200	55,000
K D2424-1.5	24 x 24 x 1.5	1.5 inch	4	29	200	65,000
L D3030-1.5	30 x 30 x 1.5	1.5 inch	6	45	200	80,000
M DR30-1.5 (Round)	30 x 1.5	1.5 inch	5	35	200	80,000
N D3636-1.5	36 x 36 x 1.5	1.5 inch	9	65	200	85,000
O DR36-1.5 (Round)	36 x 1.5	1.5 inch	7	52	200	85,000



Crush Rating – The maximum allowable pressure. **Working Load Limit** – The maximum allowable load based on the application.





“Every crane in my fleet is equipped with a set of DICA Pads, and always will.”

Ross Kovach
ROSSCO CRANE & RIGGING

PRODUCT DETAILS

- Engineered Thermoplastic Material
- TuffGrip® Handles
- Waterproof and Chemical Resistant
- Industrial Grade Safety Texturing
- Radius Edges and Corners
- Non-Conductive
- 1-2 Person Carry or Roll
- Guaranteed Unbreakable

BEST FOR

- Mobile Cranes
- Concrete Pumpers
- Aerial Lifts
- Digger Derricks

PRODUCT	W x L x H (in)	THICKNESS (in)	APPROX AREA (sq ft)	WEIGHT (lbs)	CRUSH RATING* (psi)	WORKING LOAD LIMIT* (lbs)
2" Pads						
A D1818-2	18 x 18 x 2	2 inch	2	20	500	70,000
B D2424-2	24 x 24 x 2	2 inch	4	38	500	80,000
C D2424-2-Y	24 x 24 x 2	2 inch	4	38	500	80,000
D D2424-2-O	24 x 24 x 2	2 inch	4	38	500	80,000
E D3030-2	30 x 30 x 2	2 inch	6	60	500	95,000
F D3636-2	36 x 36 x 2	2 inch	9	86	500	110,000
G D4242-2	42 x 42 x 2	2 inch	12	120	500	125,000
H D4848-2	48 x 48 x 2	2 inch	16	150	500	140,000
I DR30-2 (Round)	30 x 2	2 inch	5	45	500	85,000
J DR36-2 (Round)	36 x 2	2 inch	7	68	500	100,000
K DR42-2 (Round)	42 x 2	2 inch	9.5	92	500	115,000
L DR48-2 (Round)	48 x 2	2 inch	12.5	120	500	130,000
M DR60-2 (Round)	60 x 2	2 inch	19.5	190	500	160,000



Crush Rating – The maximum allowable pressure. **Working Load Limit** – The maximum allowable load based on the application.





“Your outrigger pads have been a solid investment safety wise by allowing our personnel to handle outrigger pads with minimal physical strain.”

Rick L. Barr
TRI-STATE GENERATION & TRANSMISSION


PRODUCT DETAILS

- Engineered Thermoplastic Material
- TuffGrip[®] Handles
- Waterproof and Chemical Resistant
- Industrial Grade Safety Texturing
- Radius Edges and Corners
- Non-Conductive
- Lifting Points for Rigging
- Guaranteed Unbreakable


BEST FOR

- Mobile Cranes
- Concrete Pumps
- Aerial Lifts
- Rock Crushers

PRODUCT	W x L x H (in)	THICKNESS (in)	APPROX AREA (sq ft)	WEIGHT (lbs)	CRUSH RATING* (psi)	WORKING LOAD LIMIT* (lbs)
3" Pads (Available in Black)						
A D2424-3	24 x 24 x 3	3 inch	4	60	600	112,000
B DR36-3 (Round)	36 x 3	3 inch	7	102	600	130,000
C DR42-3 (Round)	42 x 3	3 inch	9.5	138	600	150,000
D DR48-3 (Round)	48 x 3	3 inch	12.5	180	600	170,000
E DR60-3 (Round)	60 x 3	3 inch	19.5	285	600	210,000

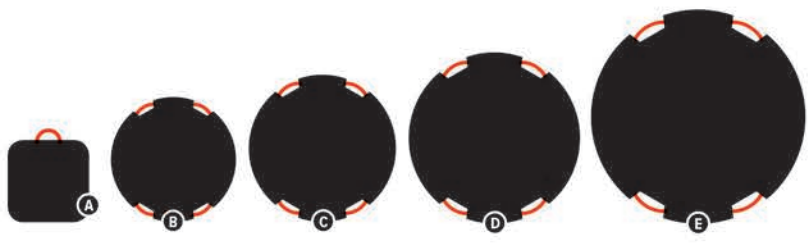

Crush Rating – The maximum allowable pressure. **Working Load Limit** – The maximum allowable load based on the application.

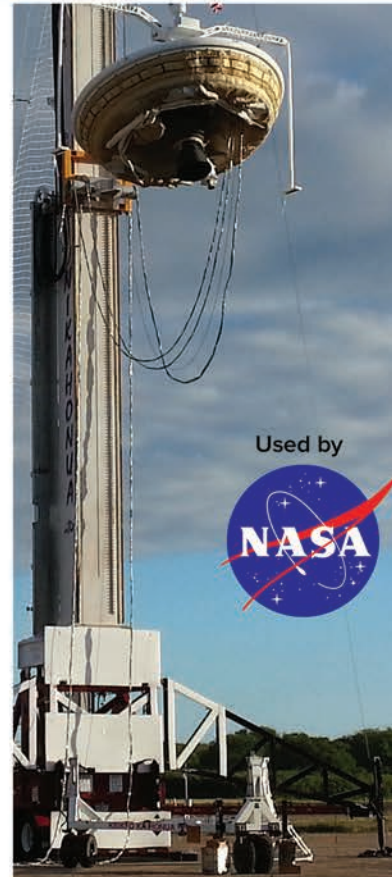



Cavity Pad Plus

Cavity Pad Plus Pads have an inverted beveled edge guard that reduces the potential of an outrigger foot escape. Pads have excellent rigidity and “nest” together for a total stored height of 3”.

BEST FOR:

Aerial Lifts, Digger Derricks, Tree Care Equipment

MODEL	W x L x H	WEIGHT
DCP1818-S4	18”x18”x1”	13 lbs.
DCP2424-S4	24”x24”x1”	23 lbs.



Cavity Pads

Cavity pads are designed to safely contain a stabilizer foot. The completely solid pad design eliminates the need for metal fasteners, providing an unbreakable foot guard.

BEST FOR:

Aerial Lifts, Digger Derricks, Tree Care Equipment

MODEL	W x L x H	WEIGHT
DC2020-1.5-A	20”x20”x1.5”	14 lbs.
DC2020-1.5L-O	20”x20”x1.5”	14 lbs.
DC2424-1.5	24”x24”x1.5”	20 lbs.



Cleated Pads

Positioned downward, the serrated cleat grips for improved traction. When positioned upward, it provides an unbreakable stabilizer foot guard.

BEST FOR:

Aerial Lifts, Digger Derricks, Tree Care Equipment

Cleat Kit Installation Options:

- 1 Cleats and hardware shipped to you for self installation
- 2 Installed by our manufacturing team on pads of your choice



Sliding Shoe Pads

Pads easily fit onto a stabilizer foot and lock in place. Equipment can be re-positioned or secured for travel without having to stow outrigger pads.

BEST FOR:

Compact Aerial Equipment, Portable Track Lifts, Mini Cranes

MODEL	W x L x H	WEIGHT
DS-1	12"x24"x1"	16 lbs.
DS-2	11"x24"x1.5"	19 lbs.
DS-3	9.25"x22"x1"	12 lbs.
DS-4	11"x24"x1"	15 lbs.



Pole Puller Pads

Steel hardware locks a pole pulling base plate into position and a rigid base pad provides unbreakable support for pole pulling operations. Custom design options available.

BEST FOR:

Pole Pulling Equipment

MODEL	W x L x H	WEIGHT
DP3224	32"x24"x1"	21 lbs.
DP3224-1.5	32"x24"x1.5"	30 lbs.



Recessed Radius

Recessed radius is designed to safely contain an outrigger foot, while the thermoplastic material provides exceptional support.

BEST FOR:

Concrete Pumps

MODEL	W x L x H	WEIGHT
D2424-2-CR	24"x24"x2"	36 lbs.
D3030-2-CR	30"x30"x2"	58 lbs.
D3636-2-CR	36"x36"x2"	84 lbs.