| REVISION HISTORY | | |
|---|---|---|
| REV. | DESCRIPTION | DATE |
| 02 | REVISED PER P13012 | 2017-10-05 |
| 03 | REVISED PER P13012 | 2017-10-09 |
| A | INITIAL RELEASE PER P13012 | 2017-10-10 |







# SPECIFICATIONS

1. CERTIFICATIONS: ECE R10;
   Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.
2. VOLTAGE (NOMINAL): 5 VDC
3. VOLTAGE (EXTREME): 5 VDC
4. CURRENT (PEAK): 0.5A (@ 5 VDC NOMINAL)
5. POWER (MAXIMUM): 2.5W (@ 5 VDC NOMINAL)
6. TEMPERATURE RANGE: -22°F (-30°C) TO 122°F (50°C)
7. CONNECTION: 4-24 AWG CABLE W/ CONNECTOR
8. MOUNTING: ADHESIVE, BRACKET
9. BASE MATERIAL: POLYCARBONATE
10. PRODUCT WEIGHT: 0.30LBS (0.14Kg)

NOTES:
1. ROHS COMPLIANT
2. WIRES NOT SHOWN FOR CLARITY
   WIRE DIMENSION IS 22.50±0.50[573±13] FROM WIRE EXIT TO BACK OF CONNECTOR
3. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)]

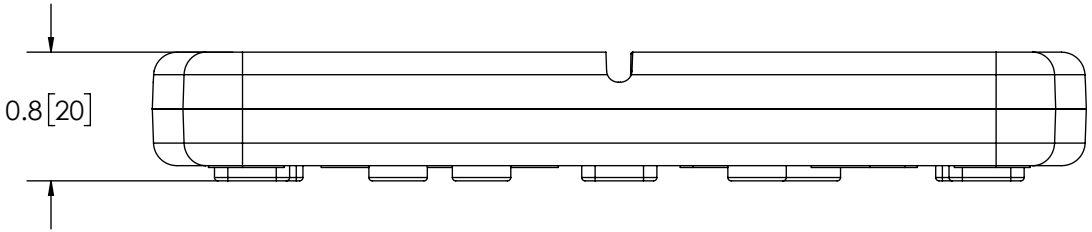

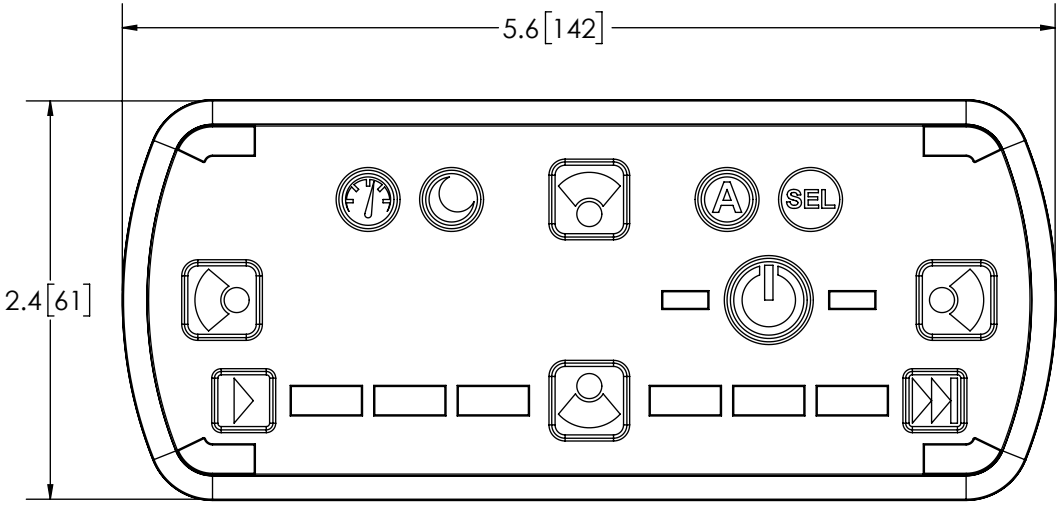SCALE 1:1.15

CAD GENERATED DRAWING
DO NOT MANUALLY UPDATE.
MODEL REFERENCED: 01

TOLERANCES ARE IN INCHES, AND MILLIMETERS
TOLERANCES UNLESS OTHERWISE STATED ARE:

| MILLIMETERS DECIMALS | INCHES DECIMALS | ANGLES |
|---|---|---|
| XX. ± 1.0mm<br>XX.X ± 0.5mm | X.X ± 0.1<br>X.XX ± 0.04<br>X.XXX ± 0.02 | ± 0.5° |
| | | FRACTIONS ± 1/64 |

THIRD ANGLE PROJECTION

| APPROVALS | | DATE |
|---|---|---|
| DRAWN BY | | 2017-10-09 |
| CHECKED | MDH | 2017-10-10 |
| MECH. ENG. | NMT | 2017-10-10 |
| ELEC. ENG. | JES | 2017-10-10 |
| TEST ENG. | | |
| SALES. | DMV | 2017-10-10 |

Electronically Controlled Use Latest Copy

ECCO® www.eccolink.com
Americas (800) 635-5900 | Europe +44 (0)113 237 5340 | Asia Pacific +61 (0)3 63322444

**CONTROLLER,ADVANCED,12+ SERIES**

| CUSTOMER PART NO. | PRODUCT SERIES: |
|---|---|
| EZ1202 | EZ1202 |

| SIZE: | DWG. NO. | REV. |
|---|---|---|
| A | EZ1202 | A |

| SHEET 1 OF 1 | Project: P13012 | Date Created: 2017-04-26 |
|---|---|---|