
REVISION HISTORY			
REV.	DESCRIPTION	DATE	
04	REVISED PER LM14240	2016-02-18	
Α	INITIAL RELEASE PER LM14240	2016-03-01	
В	REVISE PER LM14240	2016-03-14	

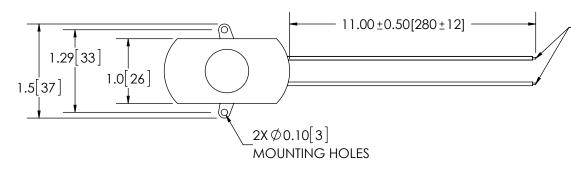


4-22 AWG WIRES W/ ENDS STRIPPED AND TINNED SOLID WHITE OUTPUT WIRE - (-) NEGATIVE -DASHED WHITE OUTPUT WIRE - (+) POSITIVE SOLID BLACK INPUT WIRE - (-) NEGATIVE DASHED BLACK INPUT WIRE - (+) POSITIVE

## **SPECIFICATIONS**

1. CERTIFICATIONS:

Note: Unique components, accessories, and hardware kits are not typically Included in the Product Certification Test Protocols. Unless otherwise Specified, the Product Certifications referred to herein are predicated upon the base product model configuration.

- 2. VOLTAGE (NOMINAL): 12 VDC
- 3. VOLTAGE (EXTREME): 5 to 15 VDC
- 4. CURRENT (PEAK): 1.5A (@ 12 VDC NOMINAL)
- 5. CONNECTION: 4-22 AWG WIRES
- 6. MOUNTING: 2 BOLT
- 7. PRODUCT WEIGHT: 0.04LBS (0.02 Kg)

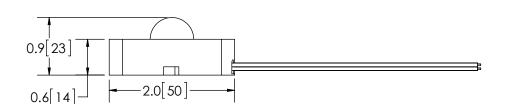

## DISCLAIMER DIMENSIONS, ILLUSTRATIONS, SPECIFICATIONS, AND CERTIFICATIONS CONTAINED IN THIS DOCUMENT ARE TYPICAL OF THE ACTUAL PRODUCT AND ARE SUBJECT TO CHANGE. ECCO ENGINEERING DOES NOT MAINTAIN FORMAL DESIGN CONTROL OF THIS PRODUCT

## SCALE 1:2 APPROVALS DRAWN BY ABD 2016-03-09 www.eccolink.com CAD GENERATED DRAWING **NOTES** DO NOT MANUALLY UPDATE. MODEL REFERENCED:01 2016-03-10 CHECKED 1. FOR INTERIOR USE ONLY TOLERANCES ARE IN INCHES, AND MILLIMETERS TOLERANCES LINLESS OTHERWISE STATED ARE: MECH. ENG. JLA 2016-03-09 2. ROHS COMPLIANT PIR MOTION SENSOR.BLACK 2016-03-09 TJT ELEC. ENG. 3. DIMENSIONS IN INCHES[MILLIMETERS (FOR REFERENCE)] X.X ± 0.1 X.XX ± 0.04 CUSTOMER PART NO. XX. ± 1.0mm XX.X ± 0.5mm PRODUCT SERIES: JRT 2016-03-09 TEST FNG FRACTIONS ± 1/64 EZ0120 X.XXX ± 0.02 ALES. JPT 2016-03-09 THIRD ANGLE PROJECTION NON DISCLOSURE AGREEMENT SIZE: DWG. NO. F70120 REV. В Date Created: 2016-02-05 Electronically Controlled Use Latest Copy SHEET 1 OF 1 Project: LM14240