




"Good Thing... Small Package"

PNEUMATIC JACKS DESIGNED TOUGH AND BUILT TO LAST



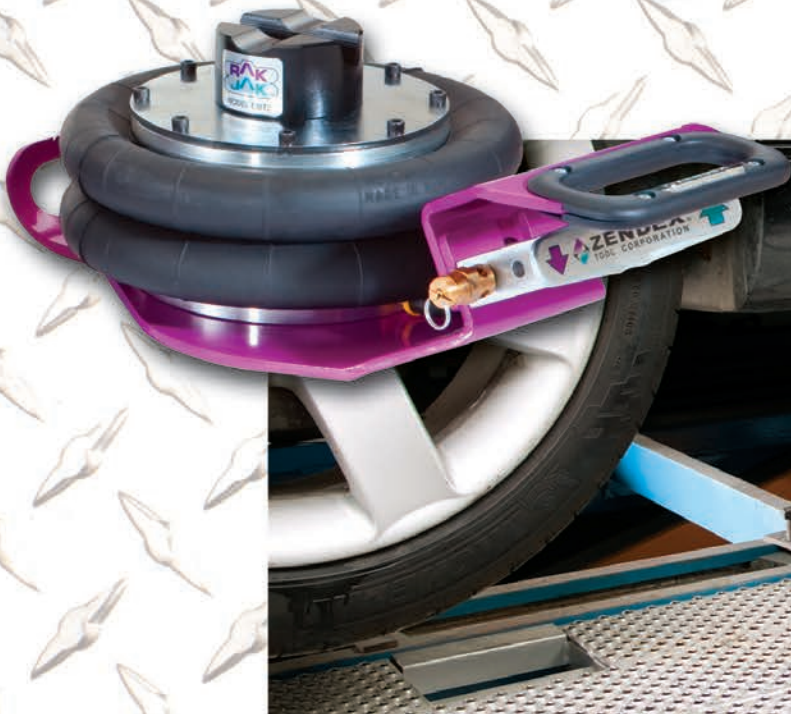

"Good Thing... Small Package"

They are the preferred product on frame racks, alignment machines and in all types of repair shops. Every RakJak is super fast and virtually maintenance free.

These quality made products are manufactured to strict tolerances in our state-of-the-art, Danbury, Connecticut, manufacturing facility*. All machining, plasma cutting and metal forming are produced by computer-controlled machines, to ensure accuracy. Each jack is then meticulously hand assembled, tested and packaged with American-made pride.



TBT2L

Whether you're using a RakJak on your frame or alignment machine, or on the floor, you can expect years of trouble-free use. In many cases, we overbuild our jacks to accomplish just that. We offer a two-year warranty and stand behind every product we make.

TBT2
10" Dia.
2 Ton



RakJak is one of the most useful tools in the body shop. It's compact, powerful and very fast to use. RakJak is simply the easiest and fastest way to install pinch weld clamps on the frame machine.

Tire changing and service work is easier than ever with the RakJak extended handle models. RakJak rolls easily to the vehicle to be lifted. Just connect an air line and the feather control valve provides smooth, rapid lifting. The handle can be adjusted in two upright positions for storage and transport. With the handle fully lowered, you can effortlessly position the RakJak under the car.

TBT3L
Heavy Duty 12" Dia.
3 Ton



In the tire and repair shops RakJak's proven reliability and durability have shown thousands of technicians a fast, cost effective means of lifting vehicles on a repetitive basis. Emergency repair highway companies have also benefited from RakJak. The highly maneuverable, compact design saves time and is easier to move than a floor jack. The large flat base is steady and resists digging in soft pavement.

When selecting the appropriate model RakJak for your use, consider these suggestions: The most popular Model is the DBT2. Its 5 ¾ inch collapsed height will fit under most cars and the 8 inch stroke will provide a 13 ¾ inch total lifting height that will lift most wheels off the ground. The lifting power of DBT2 and DBT2L is two tons. And for all around shop use, the DBT2 is more than adequate. However, if you are working on a lot of SUVs, the TBT2 is probably more suitable. The advantage of the TBT2 is the overall lifting height of 18 inches. The collapsed height of the TBT2 is higher than the DBT2 at 6 7/8 of an inch. Therefore, it may not be suitable for a shop that works primarily on small cars where the jack points are much lower. Choose the RakJak that fits your needs and enjoy years of trouble free use.

If your work is always performed on the floor, then the DBT2L or the TBT2L is really more desirable. Both models offer wheels for transport, a three-foot handle - much like a floor jack - that will adjust in a variety of positions and a control valve at the end of the handle. Remember the DBT2L and the TBT2L have the same collapsed height and extended heights as the DBT2 and the TBT2.

DBT2L
10" Dia.
2 Ton



DBT2 (on cover)



ing jack pad*
: lifting. The set
pads.



that is less than
it is permanently
will reduce the
4 7/8 inch on the
d size DBT2 jack
nently installed
ests in the same
exchangeable
save time and
iety of jack pad

The pivoting and self-aligning jack pad distributes the load evenly from end to end on its 12-inch wide platform. The pivoting action will adjust as the vehicle is being lifted. This pivoting action continuously distributes the load. Its large rubber pad protects the lifting surface and helps stabilize the load.

"We use your DBT2 RakJak to do emergency road service here around the capitol and they have been the greatest investment we have ever made. Since we started using your jack, instead of floor jacks, our damage claims are almost nonexistent."

- Scott West
West's Road Service
Delmar, N.Y.



Long handle retro kit



Convenient wall mount brackets keep your RakJaks accessible and off the floor. Organize your shop with these handy wall mount brackets. Lags and shields for masonry mounting included.



"Good Thing... Small Package"

Air Spring... the convoluted air springs have actually been used for many years as shock and vibration dampers on trucks, buses and heavy equipment. Subject to tremendous loads, these springs cycle hundreds of thousands of times with virtually no maintenance and proven reliability.

Internal Stabilizer... at the center of the jack is the internal stabilizer system made from ASTM-513 steel dom tubing. Fully machined to strict tolerances this system provides lateral and vertical stability. Calculated clearances between the members allow for flexibility during the lifting arc.

Pressure Relief Valve... designed to prevent over-inflation, the pressure relief valve Zendex has selected is a top quality certified valve which is factory tested and set to release air if pressure exceeds setting.

Air Control Valve...


precision machining, brass components, Teflon seals and a positive air lock design insure many years of trouble free use and the ultimate feather control.

Jack Pad... adjustable top swivels 360 degrees for easy grab of vehicle jack points.

Testing... every RakJak we make goes through a comprehensive testing procedure prior to shipping. Included are air leak tests, pressure relief function, mechanical action, finish and lubrication.

Convenient Handles... the handles are located both front and rear for maximum flexibility during use as well as transport.

Finish... powder coating, zinc and chrome plating along with the use of aluminum and brass are all part of Zendex Tool's design to provide the best quality, longest lasting and finest looking products we can.

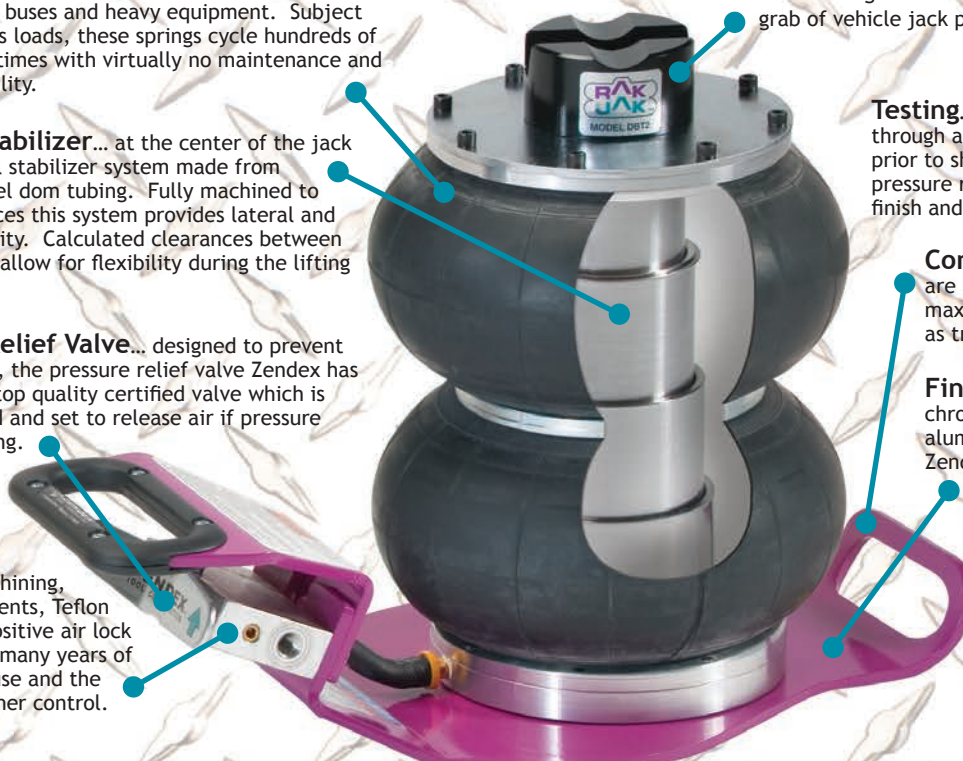

ZENDEX LIMITED WARRANTY

RakJak's limited warranty is for a full two years from date of purchase covering factory defects in material and workmanship.

Model DBT2 and DBT2L

Capacity	2 tons	Air Pressure	105 PSI
Relaxed Ht.	5.75"	Wt: DBT2	34 lbs.
Full Extension	13.75"	Wt: DBT2L	39 lbs.

Model TBT2 and TBT2L

Capacity	2 tons	Air Pressure	105 PSI
Relaxed Ht.	6.812"	Wt: TBT2	47 lbs.
Full Extension	18"	Wt: TBT2L	52 lbs.

Model TBT3L

Capacity	3 tons	Air Pressure	105 PSI
Relaxed Ht.	6.812"	Wt: TBT3L	61 lbs.
Full Extension	18"		

Specifications Subject to Change Without Notice



4 Larson Drive, Danbury, CT 06810 USA

1-800-446-5257 • 203-778-0400 • Fax: 203-778-0036

zendex@zendextool.com • www.zendextool.com