

PRO-LOK

Why Use Anything Else?



A085 Euro Strip Tool

Hold the tool with one hand and the end of the wire with your other hand.

Insert the tip of the tool into the interior of the car, working it between the door frame and body, past the black rubber weatherstripping (see photo 1.)


A lubricant can be used to assist the tool entering the car.

Work the tool into the car until the tip of the tool is inside the vehicle.

Pull the wire to direct the tool. Wrap the rubber band around the vertical button (see photo 2.)

Pull the plastic strip upwards to raise the button and unlock the vehicle (see photo 3.)

(On Mercedes vehicles, maintain firm pressure so that the vacuum system doesn't pull the button down and relock the door).

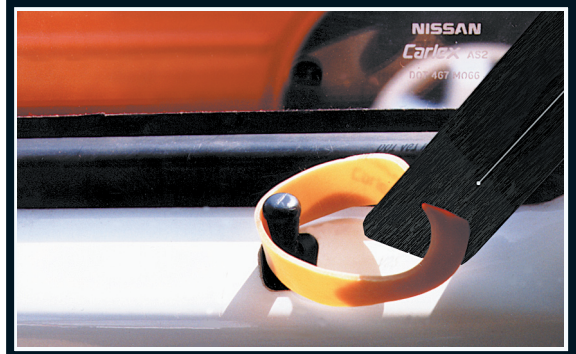

GENERAL APPLICATIONS: *This tool works on vehicles equipped with vertical buttons found on some: BMW, CADILLAC, MERCEDES and various other makes and models.*