
LED 90° Corner Mount Strip Light

10-16 Vdc Model: ECVCSLLED(xx) 10-30 Vdc Model: ECVCSLLED(xx)-3Ø (xx) = 10, 21, 32 or 43 depending on length ordered.



Important Information:

- DO NOT install this product or route any wires in the Air Bag Deployment Zone. Refer to your vehicle Owner's Manual for the location of any air bag deployment zones.
- . DO NOT connect this device to a strobe power supply. This product is self-contained and does not require an external power supply.

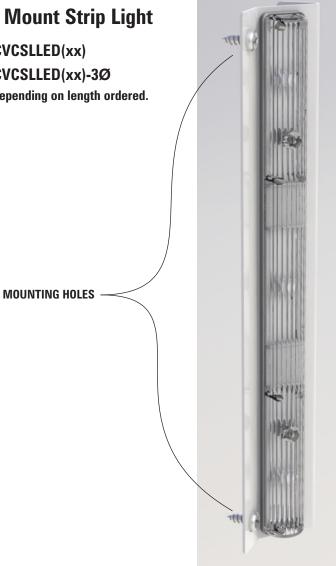

To review our Limited Warranty Statement & Return Policy for this or any SoundOff Signal product please visit our website at www.soundoffsignal.com and select the "Warranty & Returns" link along the left column of our home page. If you have questions regarding this product please contact Technical Services, Monday - Friday, 8 am to 5 pm at 1.800.338.7337, press #4 to skip the automated message. Questions or comments that do not require immediate attention may be emailed to techsupport@soundoffsignal.com.

1.800.338.7337. / www.soundoffsignal.com / Thank you for trusting us with your safety!

- 1. Using the holes in the base as a template, mark and drill pilot holes (drill size #29 or 9/64) for #10 screws (customer supplied).
- 2. If a wire entry hole is required, drill Ø3/8" hole for wire. Make sure there are no burrs that can abrade the wires.
- 3. After completing the wiring mount the strip light using customer supplied mounting screws. Make sure that wires do not bind or can be abraded by Ø3/8" hole.

WIRING:

- 1. Connect the black wire to the vehicle's ground (-) wire.
- 2. Connect the red wire to the vehicle's power (+) wire.

WIRE HOOK-UP TABLE	
WIRE COLOR:	CONNECT TO:
RED	Power (+)*
BLACK	Ground (-)
* 10.16 Vda av 10.20 Vda	

*+10-16 Vdc or 10-30 Vdc

DIMENSIONS	
Length	Width x Depth
10″	1.7″ W x 0.86″ D
21″	1.7″ W x 0.86″ D
32″	1.7″ W x 0.86″ D
43″	1.7″ W x 0.86″ D

