


The USB rechargeable MacroStream is a compact personal light that fits in the palm of your hand or comfortably in your pocket and provides unparalleled performance for its size.

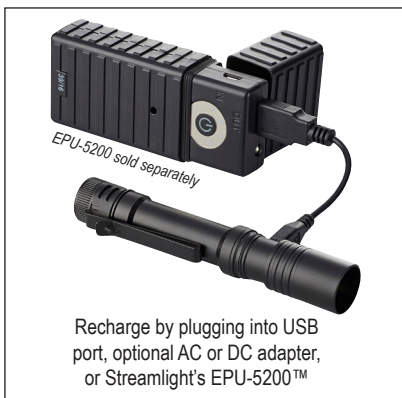

White LED with high and low modes:  
 - High: 500 lumens; 90m beam; runs 2 hours  
 - Low: 50 lumens; 30m beam; runs 8 hours

Charge indicator:  
 - Lights red when charging  
 - Lights green when fully charged

IPX4 water-resistant; 1m impact resistance tested

4.5" (114.3 mm); 2.2 oz. (62.4g) with battery

Limited Lifetime Warranty  
 Visit [streamlight.com](http://streamlight.com) for full warranty information

#66320 - MacroStream USB with USB cord and lanyard - Clam - Black

**MACROSTREAM® USB**  
**LITHIUM ION RECHARGEABLE FLASHLIGHT**

**MARKET**
**APPLICATIONS:** Professional Light - Hardware/Tool, Industrial, Law Enforcement, Security, Automotive, Sporting Goods, Consumer.

**DESCRIPTION:** The Macrostream® USB is a compact Lithium ion battery powered flashlight designed for use in all markets. It features a tail cap switch, momentary or constant on operation, high and low beams, a combination pocket/hat clip for convenience, and amazing brightness and run time for a light of its size and price. The aluminum housing with Type II Military Spec anodizing helps make the light extremely durable and abrasion resistant. To charge the light, slide the head cover forward to expose the micro USB port.

**CASE MATERIAL:** Machined aluminum alloy case. Type II MIL-Spec anodized finish. Available in Black.

**DIMENSIONS:** Length: 4.50 in. (114.3 mm) Body Diameter: 0.83 in. (21.1 mm)


**WEIGHT:** 2.20 oz. (62.4 grams) with battery (included with purchase).

**LENS:** Unbreakable polycarbonate lens.

**LIGHT SOURCE:** LED technology, impervious to shock with a 30,000 hour lifetime.

**LIGHT OUTPUT:** High: 2000 candela peak beam intensity, 90 meter beam distance and 500 lumens measured system output.  
 Low: 220 candela peak beam intensity, 30 meter beam distance and 50 lumens measured system output.

**ON/OFF:** Push button tail switch - momentary or constant on operation.

**RUN TIME:**  High: 2.0 hours of run time. Low: 8.0 hours of run time. All runtime claims are to 10% of initial lumen output.

**BATTERY:** One (1) 800 mAh Streamlight Lithium Ion cell with on board safety circuit.

 Fully recharges battery in 4.0 hours and charges battery in product.  
 Charge indication LED: Red - Charging; Green - Charged.

**FEATURES:**





 LED technology for extreme brightness.  
 IPX4 rated for water resistant operation. All openings o-ring sealed.  
 1 meter impact resistance tested.  
 Removable pocket/hat clip.

**APPROVALS:**  Meets applicable European Community Directives.

 CEC Compliant

**WARRANTY:** Streamlight's Limited Lifetime Warranty

**OPTIONAL**
**ACCESSORIES:** USB/AC adaptor(s).

	FL 1 STANDARD	HIGH	LOW
OUTPUT		500 LUMENS	50 LUMENS
RUNTIME		2h	8h
DISTANCE		90m	30m
INTENSITY		2,000cd	220cd

**PERFORMANCE CURVE**
