



# MODEL 835 E / 855 E DETACHABLE GOOSENECK CONSTRUCTION




- Full Length Recessed Boom Trough
- Dropped Wheel Bolster
- No Front Crossmember in Slope



- Low Profile Approach Plate to Accommodate Rollers or Other Tricycle Track Machines - No Ramps Required
- Traction Bars on Approach
- 8 Keyhole Tie Downs



- Easily Adjust Ground Clearance from 6.5" to 18"
- Transport at 7 Height Positions while the Neck Remains Locked
- Optional Chain / Binder Rack and Storage Box between Arms

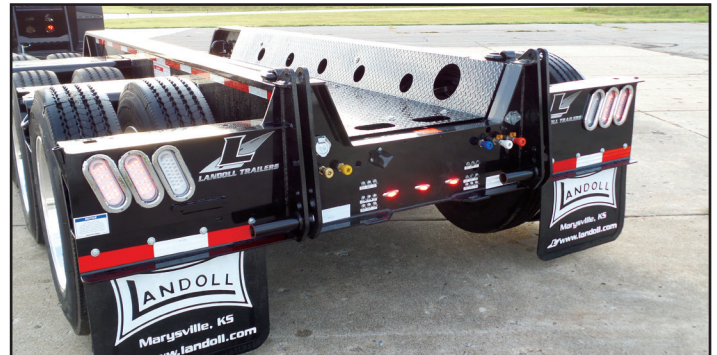

- Flip Brackets, Air / Electric Couplers
- "V" Type Rear Bumper
- High Visibility LED Lights
- Electrical Outlet for Rotating Lights
- Optional Rear Strobe LED Lighting

**Proven Solutions for Your Hauling Needs!**  
**1-800-428-5655 | [www.landoll.com/trailers](http://www.landoll.com/trailers)**





# Standard & Optional Equipment / Features

## Model 835E / 855E Detachable Gooseneck




S=Standard O=Optional

MODEL 835E	35 TON	70,000 lbs.		
MODEL 855E	55 TON	110,000 lbs.		
<b>MAIN FRAME</b>				
- Fabricated 11 $\frac{3}{8}$ " Beam, 100,000 PSI			S	
- Fabricated 13" Beam, 100,000 PSI Flange			S	
- Capacity - 70,000 lb. Distributed / 70,000 Concentrated in 12'			S	
- Capacity - 110,000 lb. Distributed / 110,000 Concentrated in 12'			S	
<b>KINGPIN SETTING</b>				
- 15"			S	
- Dual Pins 15" and 33"			S	
<b>CROSSMEMBERS</b>				
- 6" High Tensile I-Beams on 21 $\frac{3}{8}$ " Centers			S	
- 8" High Tensile I-Beams on 24" Centers			S	
<b>GOOSENECK, DECK AND ACCESSORIES</b>				
- 3rd Axle Ready			S	
- 4th Axle Ready			S	
- 12" Swing-Out Outriggers			S	
- Lowered Bolster Between Tires			S	
- HD Sloped Front Approach with Traction Bars			S	
- 6' Recessed Bucket Trough at Rear of Lower Deck			S	
- Open Boom Trough with "V" Type Bumper			S	
- One Pair Flag Holders			S	
- Centralized Grease System - All Axles			S	
<b>DECK AND FEATURES</b>				
- 102" Wide			S	
- 1 $\frac{1}{2}$ " Nominal Apitong in Track Area			S	
- Full 2" Apitong Track Area			S	
<b>LIFT CYLINDERS</b>				
- Horizontally Mounted			S	
<b>SWING CLEARANCE</b>				
- 84"			S	
- Dual Swing, 108" and 90"			S	
<b>LOADED GROUND CLEARANCE</b>				
- 6.5"			S	
<b>LOADED DECK HEIGHT</b>				
- 19.5"			S	
- 18"			S	
<b>TIE DOWNS / CHAIN GOTCHAS</b>				
- (24) Total, All Angled D-Rings, 7 Each Side Lower Deck, 1 on End of Each Bolster, 2 at Rear of Lower Deck, 2 at Top of Rear Slope, 2 at Rear of Trunnion			S	
- (22) Total, All Angled "D" Rings, 7 Each Side Lower Deck, 1 on the End of Each Bolster, 2 at Rear of Lower Deck, 2 at the Top of Rear Slope, 2 at Rear of Trunnion			S	
<b>STORAGE AREA</b>				
- (1) Between Main Frame at Front of Lower Deck (41"W x 24"L x 10"D)			S	
- (1) Between Main Frame at Front of Lower Deck (41"W x 21"L x 7"D) 1 at Rear of Lower Deck (32"W x 14"L x 7"D)			S	
<b>SUSPENSION / AXLES</b>				
- SAF-Holland/Neway Air Ride, 25,000 lbs. Capacity with Mechanical Ride Height Control Valve			S	
- (2) 25,000 lbs. Dual Tire, Oil Bath Bearings			S	
- (3) 25,000 lbs. Dual Tire, Oil Bath Bearings			S	
- 50" Spacing (835)			S	
- 50" Spacing (855-48CA)			S	
- 54" Spacing (855-53)			S	
- Automatic Slack Adjusters - All Axles			S	
<b>BRAKES</b>				
- 16.5x7 Full Air with Spring Brakes ABS 4S2M			S	
- 16.5x7 Full Air with Spring Brakes on 3 Axles ABS, 4S2M			S	
<b>TIRES / RIMS</b>				
- 255/70R 22.5 LRH			S	
- 22.5x8.25 Steel			S	
- 22.5x7.50 Aluminum			O	
- Hub Pilot / Steel Outboard Brake Drums			S	
<b>HYDRAULIC HOOK UP</b>				
- Hydraulic Quick Couplers 2,500 PSI - 20 GPM at Controls, 50 GPM Max			S	
<b>LIGHTS</b>				
- Grote Clear Lens with Chrome Bezel (10-Year Warranty)			S	
- Grote "Xtreme" Wiring Harness (7-Year Warranty)			S	
<b>FINISH / COLOR</b>				
- 400° Bake / Steel Grit Shot Blast to Bright Metal			S	
- Zinc Rich Powder Primer			S	
- TGIC Polyester Powder Coat White, Black, Yellow, Blue, Red, Green, Sapphire Blue, Dark Gray			S	
<b>WEIGHT (BASE)</b>				
- 51' - 835 - 17,740 lbs. +/- 3%			S	
- 53' - 855 - 23,900 lbs. +/- 3%			S	
<b>ESTIMATED WEIGHTS</b>				

Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.



Scan for More!



Call 1-800-428-5655

Proven Solutions for Your Hauling Needs!

[www.landoll.com/trailers](http://www.landoll.com/trailers)


1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779

Remember: Quality is Always a Bargain!





***GALVANIZING*** ***OPTION***  
***GALVANIZING***  
***AVAILABLE ON ALL TRAILERS***

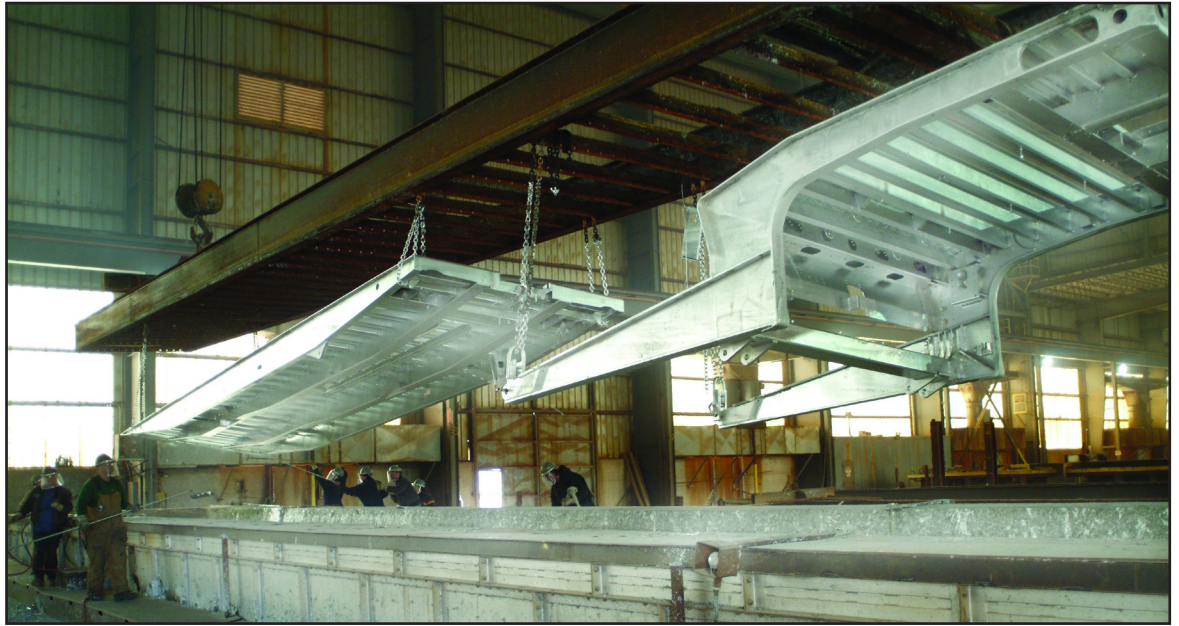

***Proven Solutions for Your Hauling Needs!***  
***1-800-428-5655 | [www.landoll.com/trailers](http://www.landoll.com/trailers)***







## Galvanizing Option for Corrosion Resistance



Pictures and content may include optional equipment and/or standard features that may not be standard on all models. Specification and design subject to change without notice. Weights and measurements are best estimates and should not be treated as actual. There are other features and optional equipment available. If you have any questions, consult the factory. Capacity ratings are frame capacities only. Actual load capacities may be restricted by factors such as gross axle weight ratings (GAWR) or state and federal regulations.

**Call 1-800-428-5655**

***Proven Solutions for Your Hauling Needs!***

***www.landoll.com/trailers***

1900 North Street | Marysville, KS 66508 | Ph: 785-562-5381 | Fax: 888-293-6779

***Remember: Quality is Always a Bargain!***

