



XL GALVANIZED MFG



FEATURES

- Galvanized finish extends trailer life up to three times that of non-galvanized trailers
- Fully submerged in hot zinc to create durable galvanized finish over every inch of the trailer
- 18" loaded deck height with 6" ground clearance
- Lockable toolbox in the gooseneck with light and chain rack
- Rear is reinforced for flip axle



SUPERIOR CORROSION RESISTANCE


Galvanizing protects your trailer from corrosion, enabling it to withstand harsh weather and road conditions. Galvanizing also provides additional surface strength for excellent abrasion resistance. Scratches will self-repair to seal out the elements with little maintenance. With a base weight of only 15,600 pounds, the XL galvanized 80 MFG does not sacrifice hauling capacity for added durability.

VERSATILE HAULING CAPABILITY

Manual ride height control and double donuts allow the main deck height to vary 1.5 inches in the wheel area and 1.5 inches at the neck to suit drivers' needs over varying terrains. The XL MFG deck is fully equipped for versatile hauling, with 14 half-inch chain drops per side, 8 bent d-rings per side, and swingout outrigger brackets on 24-inch centers. The rugged Apitong decking stands up to years of wear and tear.



Zips.com | 800-222-6047

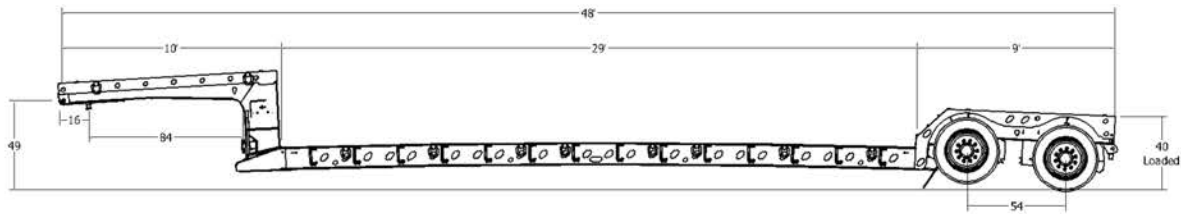

XL 80 & 90 GALVANIZED MFG SPECS

XL 80 MFG CAPACITY

capacity: 80,000 lb overall
concentrated: 70,000 lb in 16'

XL 90 MFG CAPACITY

capacity: 90,000 lb overall
concentrated: 80,000 lb in 16'

OVERALL LENGTH & WIDTH

overall length: 48'
overall width: 102"

GOOSENECK

mechanical detachable full-width
10' long
49" 5th wheel height
84" swing clearance
16" king pin setting with 3/8" plate
2 bent d-rings per side
2 pan style d-rings per side,
on corners
1 1/8" Apitong decking flush
aluminum mudflaps
double donut front connector plate
toolbox in base w/ lockable
aluminum lid, chain rack, light
XL 90 MFG only: brackets for flip neck

GOOSENECK OPTIONS

pull out lights
1 pair clearance lights
1 3/8" Apitong decking - raised
registration holder
triple donut front connector plate
XL 90 MFG only: 36" flip neck

MAIN DECK

29' long
T-1, 80K web
(4) 12" fabricated i-beams
18" loaded deck height
6" ground clearance
6" & 4" jr. i-beam cross members
on 12" alt. centers
8 bent d-rings per side
1 1/8" Apitong decking flush,
center covered
ramp tapers to 4"
(14) 1/2" chain drops per side
swing out outrigger
brackets on 24" centers

MAIN DECK OPTIONS

center deck open
storage compartments in front
of main deck
removable swing out outriggers
Oak outrigger planks, 2" x 10"
1 3/8" Apitong decking - raised
clearance lights
4-way plug(s)

REAR BRIDGE

9' long
40" deck height
1 1/8" Apitong decking flush
2 flag holders
2 stake pockets in tail channel
2 pan style d-ring per side,
on corners
frame reinforcement for flip axle
66" wide bumper at rear

REAR BRIDGE OPTIONS

1 pair clearance lights
pull out lights
4" amber strobe tail light
additional tail light
battery back up
(1) 4-way plug
1 3/8" Apitong decking - raised
dock bumpers

SUSPENSION

25,000 lb air ride
raise and lower valve
manual ride height control

SUSPENSION OPTIONS

liquid filled air gauge
Air-weigh digital scale
electric dump valve with 4-way plug
and wire

AXLES

(2) 25,000 lb nominal
54" spacing
hub pilot, outboard drums
4S2M ABS
16 1/2" x 7" brakes
2 pair spring brakes

AXLE OPTIONS

hubometer
TP axles (same inner & outer bearings)

WHEELS & TIRES

8.25 x 22.5 steel rims
255 / 70R / 22.5 tires

WHEEL & TIRE OPTIONS

aluminum mill wheels (inside)
aluminum mill wheels (outside)
aluminum polished wheels (outside)
aluminum Durabright wheels (outside)
Michelin 255/70R/22.5 tires
Goodyear 275/70R/22.5 tire
(41" rear bridge)

LIGHTING

12V sealed Grote harness
rubber mounted LED lights
2 tail light package with
aluminum cover
6 clearance lights per side
1 mid-turn light per side

FINISH

galvanized

WARRANTY

5 year structural

AVAILABLE MODELS

XL 80 MFG
XL 90 MFG

other custom capacities also available,
ask your sales representative for details
standard features vary with custom MFGs