



XL MFG: MINI DECK



FEATURES

- 12" loaded deck height for tall loads
- Steel flooring on center deck, Apitong on outer bays
- Unique 3 beam deck design is light and strong
- Deck uses 4" junior I-beams on 18" centers
- Full-width platform adds loading space
- 12 d-rings provide tie-down locations
- Front ramp tapers to four inches



RUGGED & VERSATILE MAIN DECK


XL HDG Mini-decks feature a 12" loaded deck height with 4" of ground clearance. XL Mini-decks are available in capacities from 60,000 pounds to 80,000 pounds, with base weights as low as 16,500 pounds. They come in both 48' long and 53' long - with 29' or 34' in the well, respectively.

AIR OPERATED HATBOX OPTION

The mechanical gooseneck with an air bag hatbox allows the user to raise and lower the deck to clear obstructions and adjust to the tractor's fifth wheel height without the use of hydraulics. Adjust the air operated hatbox to your desired height, and simply secure with lock pins.



Zips.com | 800-222-6047

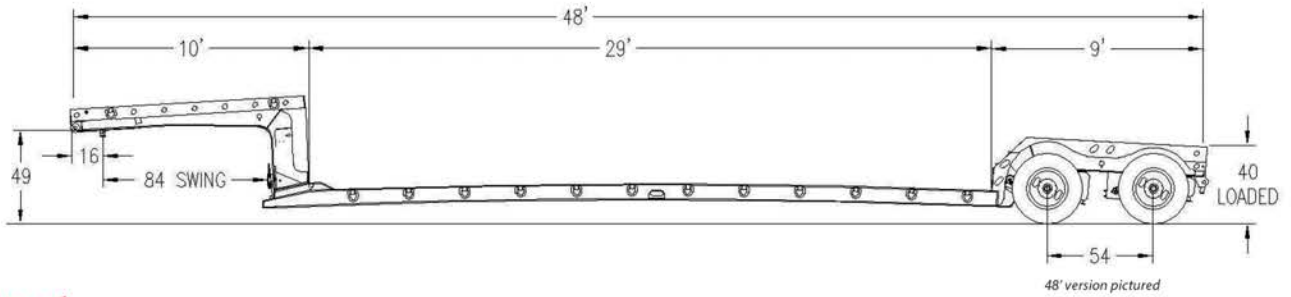

XL 60, 70 & 80 MFG: MINI-DECK

XL 60 MFG: MINI CAPACITY

capacity: 60,000 lb overall
concentrated: 60,000 lb in 16' closed

XL 70 MFG: MINI CAPACITY

capacity: 70,000 lb overall
concentrated: 70,000 lb in 16' closed

XL 80 MFG: MINI CAPACITY

capacity: 80,000 lb overall
concentrated: 80,000 lb in 16' closed

OVERALL LENGTH & WIDTH

overall length: 48' or 53'
overall width: 102"

STANDARD GOOSENECK

mechanical detachable full-width
10' long
49" 5th wheel height
84" swing clearance
16" king pin setting
2 bent d-rings per side
1 1/8" Apatong decking - flush
frame reinforcement for flip neck

AIR HATBOX OPTION

mechanical detachable full-width
10' long
40" - 52" 5th wheel height,
12" of travel
82" swing clearance
18" king pin setting
2 bent d-rings per side
1 1/8" Apatong decking - flush
aluminum mudflaps

OTHER GOOSENECK OPTIONS

pan style d-rings
double donuts
36" flip neck extension

MAIN DECK

48' version: 29' long
53' version: 34' long
T-1 flange, 80K web
(2) 8" fabricated i-beams
center box beam
12" loaded deck height
4" ground clearance

4" jr i-beam cross members
on 18" centers
80 only: mid-header
12 bent d-rings per side
1 1/8" Apatong decking - flush
in outer bays
steel floor in center deck
ramp tapers to 4"

MAIN DECK OPTIONS

1 3/8" Apatong decking - raised
additional clearance lights
4-way plug(s)
chain drops
additional d-rings
Durabek non-slip on center deck

REAR BRIDGE

9' long
40" deck height
1 1/8" Apatong decking flush
2 flag holders
2 bent d-rings in tail channel
2 pair pan-style d-rings, on corners
frame reinforcement for flip axle

REAR BRIDGE OPTIONS

clearance lights
pull out lights
4" amber strobe tail light
additional tail light
battery back up
(1) 4-way plug
1 3/8" Apatong decking - raised
dock bumpers

SUSPENSION

25,000 lb air ride
raise and lower valve
manual ride height control

SUSPENSION OPTIONS

liquid filled air gauge
air weigh digital scale
control in aluminum box - ball valves
electric dump valve with 4-way plug
and wire

AXLES

(2) 25,000 lb nominal
hub pilot, outboard drums
4S2M ABS
16 1/2" x 7" brakes
(2) pair spring brakes

AXLE OPTIONS

PSI tire inflation system
hubometer
TP axles (same inner & outer bearings)

WHEELS & TIRES

8.25 x 22.5 steel rims
255 / 70R / 22.5 tires

WHEEL & TIRE OPTIONS

aluminum mill wheels (inside)
aluminum mill wheels (outside)
aluminum polished wheels (outside)
aluminum Durabright wheels
(outside)
Michelin 255/70R/22.5 tires

LIGHTING

12V sealed Grote harness
rubber mounted LED lights
2 tail light package with
aluminum cover
2 clearance lights per side
1 mid-turn light per side
7 pole electric socket

PAINT

black, IH red, CAT yellow
air & electric done after paint

PAINT OPTIONS

non-standard paint colors
non-standard metallic paint

WARRANTY

5 year structural
1 year paint

AVAILABLE MODELS

XL 60 HDG: Mini-deck
XL 70 HDG: Mini-deck
XL 80 HDG: Mini-deck