

INSANE PERFORMANCE.
LITHIUM POWERSPORT BATTERY.™

10X

5X

MORE POWER.

MORE STARTS.

LONGER LIFE.

DYNAMIC BMS.

Equipped with an auto-enabled, advanced battery management system that provides maximum protection, performance, and bi-directional cell equalization for long-lasting stability. No BMS reset needed.

ACTIVE PROTECTION.

Protects against over-charge, extreme-heat, short-circuit, over-discharge, extreme-cold, and over-current.


SHOCK ABSORBTION.

Designed with a custom rubber dampening base and foam inserts to extend the life of the battery and keep connections secure.



30339 Diamond Parkway, #102 Glenwillow, OH 44139 | USA 1.800.456.6626

no.co

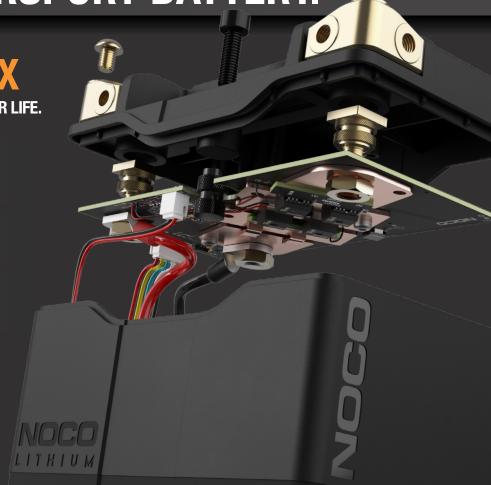

UNIVERSAL MOUNTING.

Modular spacers can be added to alter the size and allow the battery to be safely and securely mounted. A removable mounting block allows the battery to fit more applications. The threaded insert enables direct-mounting for additional

Removable Mounting Block Hex Screw M6-1x16mm Threaded Insert M6-1 Thread Size.











MULTI-CONNECTION TERMINALS.

Equipped with premium IP66 waterproof copper PCB plates. NLP Terminals can be mounted from the front, side, or top, and can be removed altogether depending on the application.



RAPID RECHARGE.

Use the Lithium mode on a Genius charger to fully recharge an NLP battery in minutes. See Genius models and charging times below.

COMPATABLE SIZES.

BCI SIZES YUASA SIZES

BTX4L-BS YTZ5S-BS BTX5L-BS YTX4L-BS BTX7L-BS YTX5L-BS YTX7L-BS

ETX SIZES

No Compatable Sizes.



RECHARGE TIME GENIUS1 120 Minutes **GENIUS2** 60 Minutes **GENIUS5** 24 Minutes **GENIUS10** N/A

TECHNICAL SPECIFICATIONS


I LUIIIIIUAL UI	Lon Ioanion	9	
BCI SIZE:	5		
CHEMISTRY:	Lithium Iron Phosphate (LiFePO4)		
NOMINAL Voltage:	12.8		
AMP-HOURS:	2		
WATT-HOURS (WH):	25.6		
STARTING CURRENT:	250		
CHARGING Voltage (V):	14.6V		
CHARGING CURRENT (A):	6A (Max)		
OPERATING Temperature:	-20°C to 60°C		
CHARGING TEMPERATURE:	-10°C to 50°C		
STORAGE TEMPERATURE:	-20°C to 60°C		
WEIGHT:	1.5 lbs (0.69 kg)		
VOLUMETRICS:	Retail Packaging: Dimensions: 5.87" x 4.17" x 4.65" Weight: 2.44 lbs UPC: 0-46221-19007-6	Master Carton: Dimensions: 13.50" x 6.18" x 10.63" Weight: 15.93 lbs Quantity: 6 UCC: 10046221190073	

Inner Carton:

Dimensions: 6.02" x 4.37" x 5.04"

WHAT'S IN THE	BOX		
3.4" (88mm)	4.5" (113mm)	2.8" (70mm) LxWxH Minimum. 4.5" x 2.8" x 3.4" (113mm x 70mm x 88mm)	LxWxH Maximum. 4.5" x 2.8" x 4.3" (113mm x 70mm x 132mm)











Units Per Pallet:

378 Units